


S.NO	Display Specification	Rental P4mm Details	Rental P6mm Details
LED Specifications			
1	LED chips	SMD 2020	SMD 2020
2	LED composition	SMD 3 in 1	SMD 3 in 1
3	LED average work life-time	≥100000h in theory, typical 60000h	≥100000h in theory, typical 60000h
LED Panel Specification			
4	Pixel pitch	4mm	6mm
5	Pixel density	62500 pixels/m²	27777 pixels/m²
6	LED panel pixel matrix (WxH)	48x48	32x32
7	LED panel area(WxH)	192x192mm	192x192mm
8	LED module pixel matrix (WxH)	144x144	96x96
9	LED module area (WxH)	576x576mm	576x576mm
10	Housing material	Aluminum	Aluminum
11	LED module Quantity	8 Pieces=4x2	8 Pieces=4x2
LED Display Specification			
10	Pixel matrix (WxH)	576x288	384x192
11	Display area(WxH)	2304x1152mm	2304x1152mm
12	Screen resolution (pixels)	165888	73728
13	Viewing angle (H/V):	160°/160°	160°/160°
14	White balance brightness :	≥1000 nits	≥1000 nits
15	Gray scale	11-14bits	10-12bits
16	Signal processing level	16bits	16bits
17	Scanning method	1/24	1/16
18	Color	281,474,976,710,656	281,474,976,710,656
19	Best viewing distance	3~40m	5~40m
20	Refresh rate	≥1920Hz	≥1920Hz
21	Frame Rate	50/60 fps	50/60 fps
22	Brightness Control	0-100%	0-100%
23	Color temperature adjustment	3000K-9500K adjustable	3000K-9500K adjustable
24	Power input	85-265 VAC (50/60 Hz)	85-265 VAC (50/60 Hz)
25	Max power	About 500W/m²	About 500W
26	Average power	About 115W/m²	About 115W
27	Weight	About 106kg	About 106kg
28	Sides	Single side display	Single side display
29	Maintenance access	Support Front / Rear access, optional	Support Front / Rear access, optional
31	Work ambient temperature	-10℃ ~ + 50℃	-10℃ ~ + 40℃
32	Storage ambient temperature	-20℃ ~ +60℃	-20℃ ~ +50℃
33	Work ambient humidity	10% ~ 80% RH	10% ~ 80% RH
34	Storage ambient humidity	10% ~ 80% RH	10% ~ 80% RH
35	Display file formats	Support -Text, pictures and all types of videos	Support-Text, pictures and all types of videos
36	Communication Hardware	Ethernet	Ethernet
37	System platform	Microsoft Windows compatible,	Microsoft Windows compatible,
38	Computer	Clients offer on site	Clients offer on site
44	Software and User's manual	In English included.	In English included.
45	Field instructor	Yes, If need	Yes, If need
46	Training on site	Software introduction in CD	Software introduction in CD




Front View

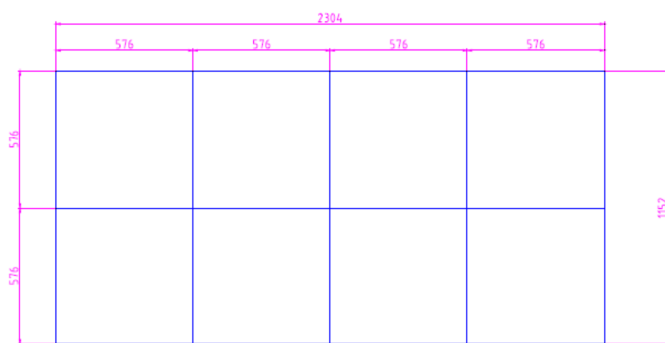

Side View



Top View

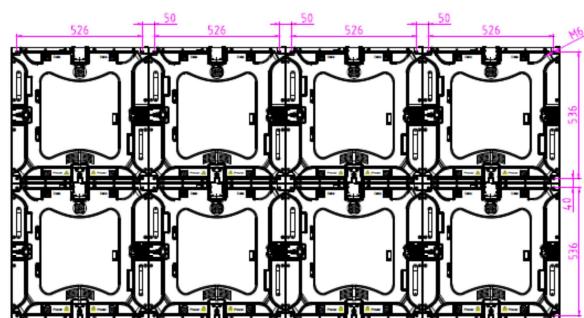

Rear View

Notes:
 MATERIAL: 5052-H32
 PITCH: 4mm & 6mm SMD 1R1G1B
 MODULE WEIGHT:106 kg

3.1.2 BOM and Quotation

Option 1: P4mm Equipment List and Price			
Items	Description	Qty	FOB Shanghai USD
LED Display		3	\$16320
Controller:		1	\$500
Software		1	\$0
Total mount:			\$16820

Option 2: P6mm Equipment List and Price			
Items	Description	Qty	FOB Shanghai USD
LED Display		3	\$14370
Controller:		1	\$500
Software		1	\$0
Total mount:			\$14870