



icsp

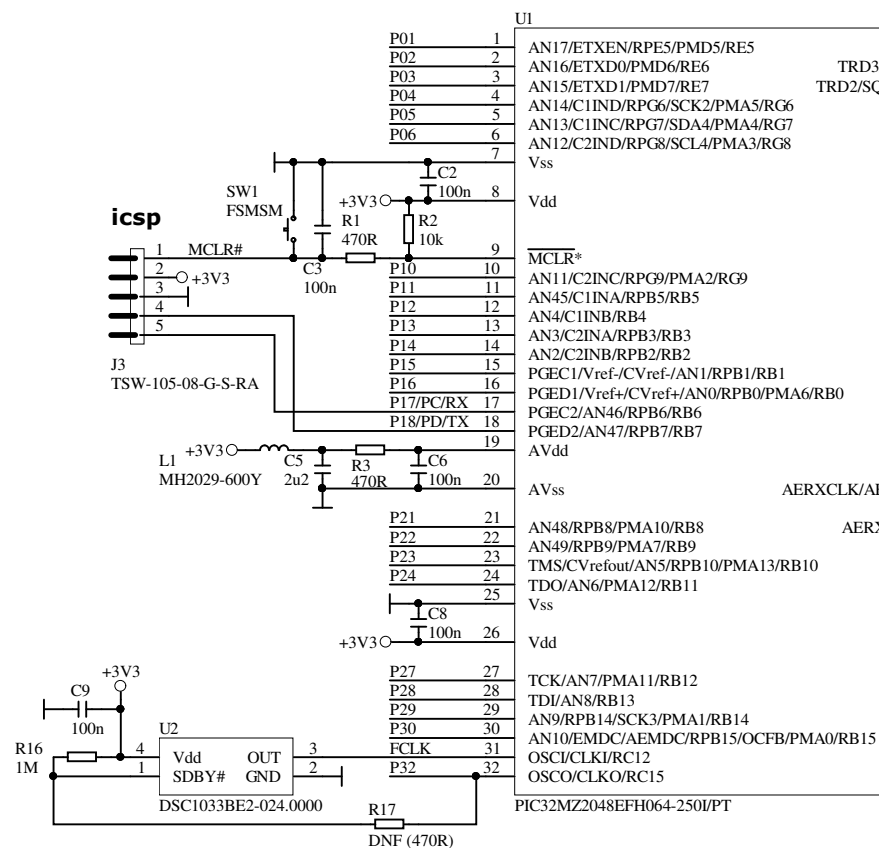


microSD

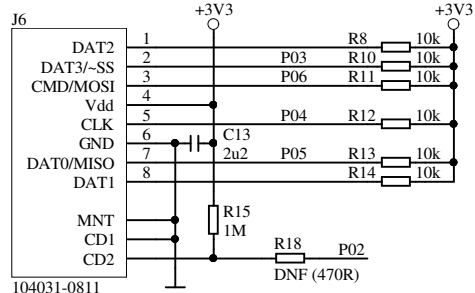

MikroBus+ receptacle (2x SLW-108-01-L-D)


left

right

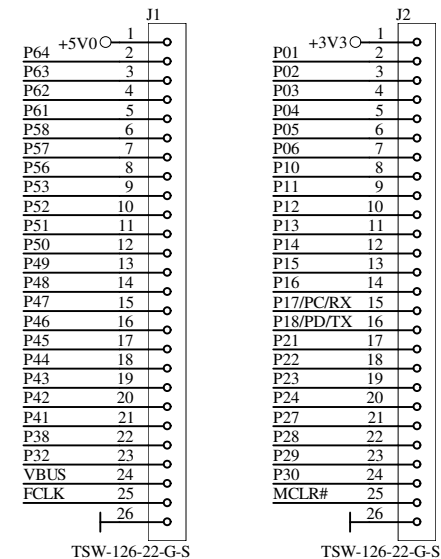


All resistors are 1% accuracy unless otherwise specified

All non-polar capacitors are COG, NP0, or X-type, 10%, 6.3V or higher, unless otherwise specified

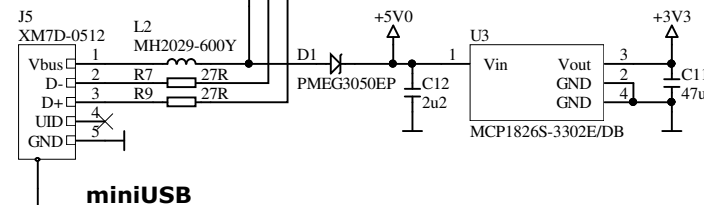

miniUSB

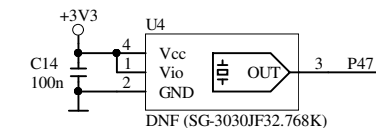

OPTION: 32.768kHz oscillator

Rittle Board

rJ3 (C) knivd@me.com

rittle.org