

Displaytech Ltd.

Website: www.displaytech.com.hk

LCD Module Product Specification

Product: 64128M-RGB Series LCD Module (128 x 64 DOTS)

PRODUCT SPECIFICATIONS

- GENERAL SPECIFICATION
- ABSOLUTE MAXIMUM RATINGS
- ELECTRICAL CHARACTERISTICS
- ELECTRO-OPTICAL CHARACTERISTICS
- BLOCK DIAGRAM
- MECHANICAL DRAWING
- BACKLIGHT DRAWING
- BACKLIGHT SPECIFICATION
- QUALITY GUARANTEE
- PRECAUTIONS FOR USING LCD MODULES
- USING LCD MODULES
- REVISION RECORD

Contents in this document are subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Displaytech Ltd.

10 June 2008.

■ GENERAL SPECIFICATION

Item	Contents
Display Format	128 x 64 DOTS
Dot Size (W x H)	0.48mm x 0.48mm
View Area (W x H)	70.00mm x 40.00mm
Module Size (W x H x T)	77.40mm x 52.40mm x 10.50mm
LCD Type	FSTN
Polarizer Mode	Transflective
View Angle	6 o'clock / 12 o'clock
Backlight	LED
Backlight Driver Type	External Power
Backlight Color	RGB
Controller & LCD Driver	ST7565R-G
Driving Method	1/65 Duty, 1/9 Bias

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C VSS=0V)

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Power Supply for Logic	VDD-VSS	-0.3	---	3.6	V
Power Supply for LCD	V0-VSS	-0.3	---	13.5	V
Input Voltage	VIN	-0.3	---	VDD+0.3	V
Supply Voltage for LED Backlight	V _{LED}	---	3.2	---	V
Normal Operating Temperature	Top	0	---	50	°C
Normal Storage Temperature	Tst	-10	---	60	°C
Wide Operating Temperature	Top	-20	---	70	°C
Wide Storage Temperature	Tst	-30	---	80	°C


■ ELECTRICAL CHARACTERISTICS (Ta=25°C, VDD=3.0V)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply for LCM	VDD-VSS	---	2.85	3.0	3.15	Volt
Input Voltage	VIL	L level	V _{ss}	---	0.2VDD	Volt
	VIH	H level	0.8VDD	---	VDD	Volt
LCD Module Driving Voltage	VO-VSS	---	---	---	---	Volt
		25°C	---	9.0	---	
		---	---	---	---	
Supply Current for LCM	IDD	VDD=3.0V	---	0.5	---	mA
	Ie	---	---	---	---	
	ILED	VLED=3.2V	---	80	---	



■ ELECTRO-OPTICAL CHARACTERISTICS

NO	Item	Symbol	Measuring Condition	STD.Value				Unit	Remark
				°C	Min	Typ	Max		
1	Recommended Operating Voltage	VLCD	$\theta = 0$ $\Phi = 0$	25	---	9.0	---	V	Note1 Note2
2	Operating Voltage	Vth	$\theta = 0$ $\Phi = 0$	0	---	---	---		
				25	---	9.0	---		
				40	---	---	---		
		Vsat	$\theta = 0$ $\Phi = 0$	0	---	---	---		
				25	---	---	---		
				40	---	---	---		
3	Response time	Tr	$\theta = 0$ $\Phi = 10$	0	---	---	---	ms	Note4
				25	---	218	268		
				40	---	---	---		
		Tf	$\theta = 0$ $\Phi = 10$	0	---	---	---		
				25	---	115	165		
				40	---	---	---		
4	Viewing Angle ($Cr \geq 2$)	θ	$\Phi = 0^\circ$	25	-10	10	40	Deg	Note1
		θ	$\Phi = 180^\circ$	25	30	10	---		
		θ	$\Phi = 90^\circ$	25	30	---	---		
		θ	$\Phi = 270^\circ$	25	---	---	---		
5	Current Consumption	ILCD	Hz=64	25	---	82	---	uA	Note3

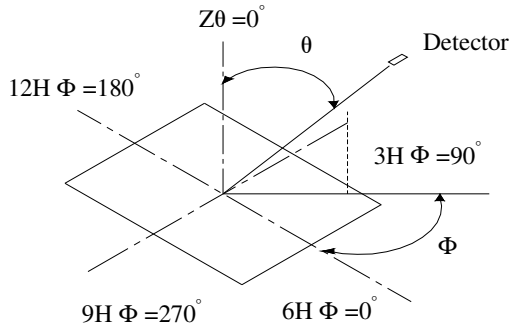NOTE 1: DEFINITION OF VIEWING ANGLE AND DIRECTION




NOTE 2: THERSHOLD VOLTAGE AND SATURATION VOLTAGE

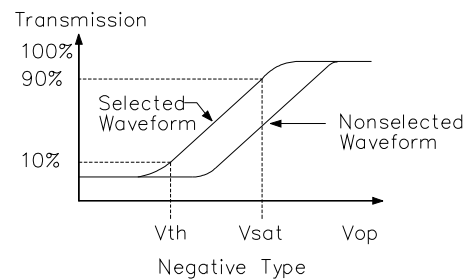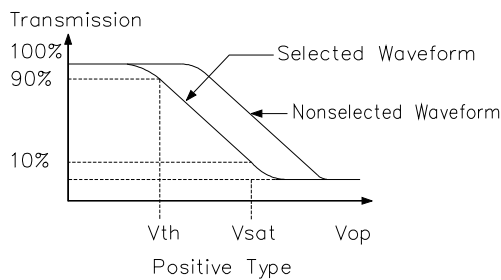


Vth: The voltage Vop which the transmission rate of segment is 90%(positive) or 10%(negative) of saturated value on conditions of the selected waveform. (non-selected waveform is opposition)

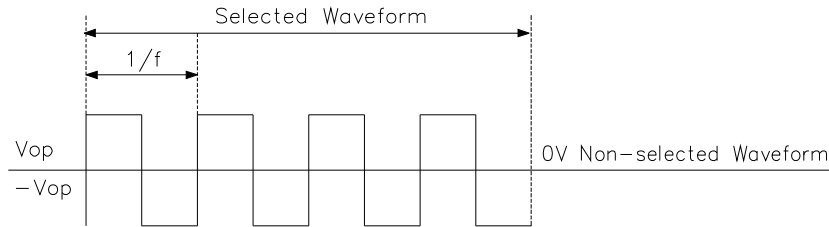Vsat: The voltage Vop which the transmission rate of segment is 10%(positive) or 10%(negative) of saturated value on conditions of the selected waveform. (non-selected waveform is opposition)

NOTE 3: CURRENT CONSUMPTION (I_{LCD})**Conditions:**

1. Driving waveform: static waveform.

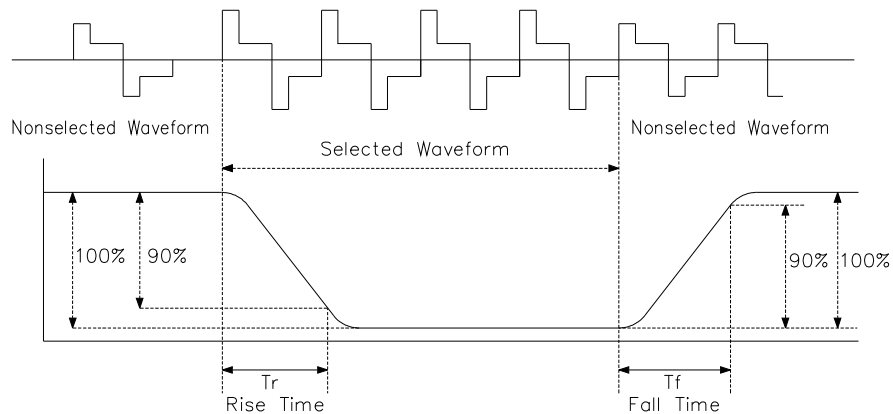2. Voltage applied to all segments

NOTE 4: RESPONSE TIME (T_r , T_f)**NOTE 5: CONTRAST RATIO (CR)****5.1 POSITIVE TYPE:**

$$\text{CONTRAST RATIO} = \frac{\text{BRIGHTNESS AT VOP (NON-SELECTED)}}{\text{BRIGHTNESS AT VOP (SELECTED)}}$$

5.2 NEGATIVE TYPE:

$$\text{CONTRAST RATIO} = \frac{\text{BRIGHTNESS AT VOP (SELECTED)}}{\text{BRIGHTNESS AT VOP (NON-SELECTED)}}$$


NOTE 6: CAPACITANCE (C)

Measuring Methode Of Capacitance

**Conditions:**

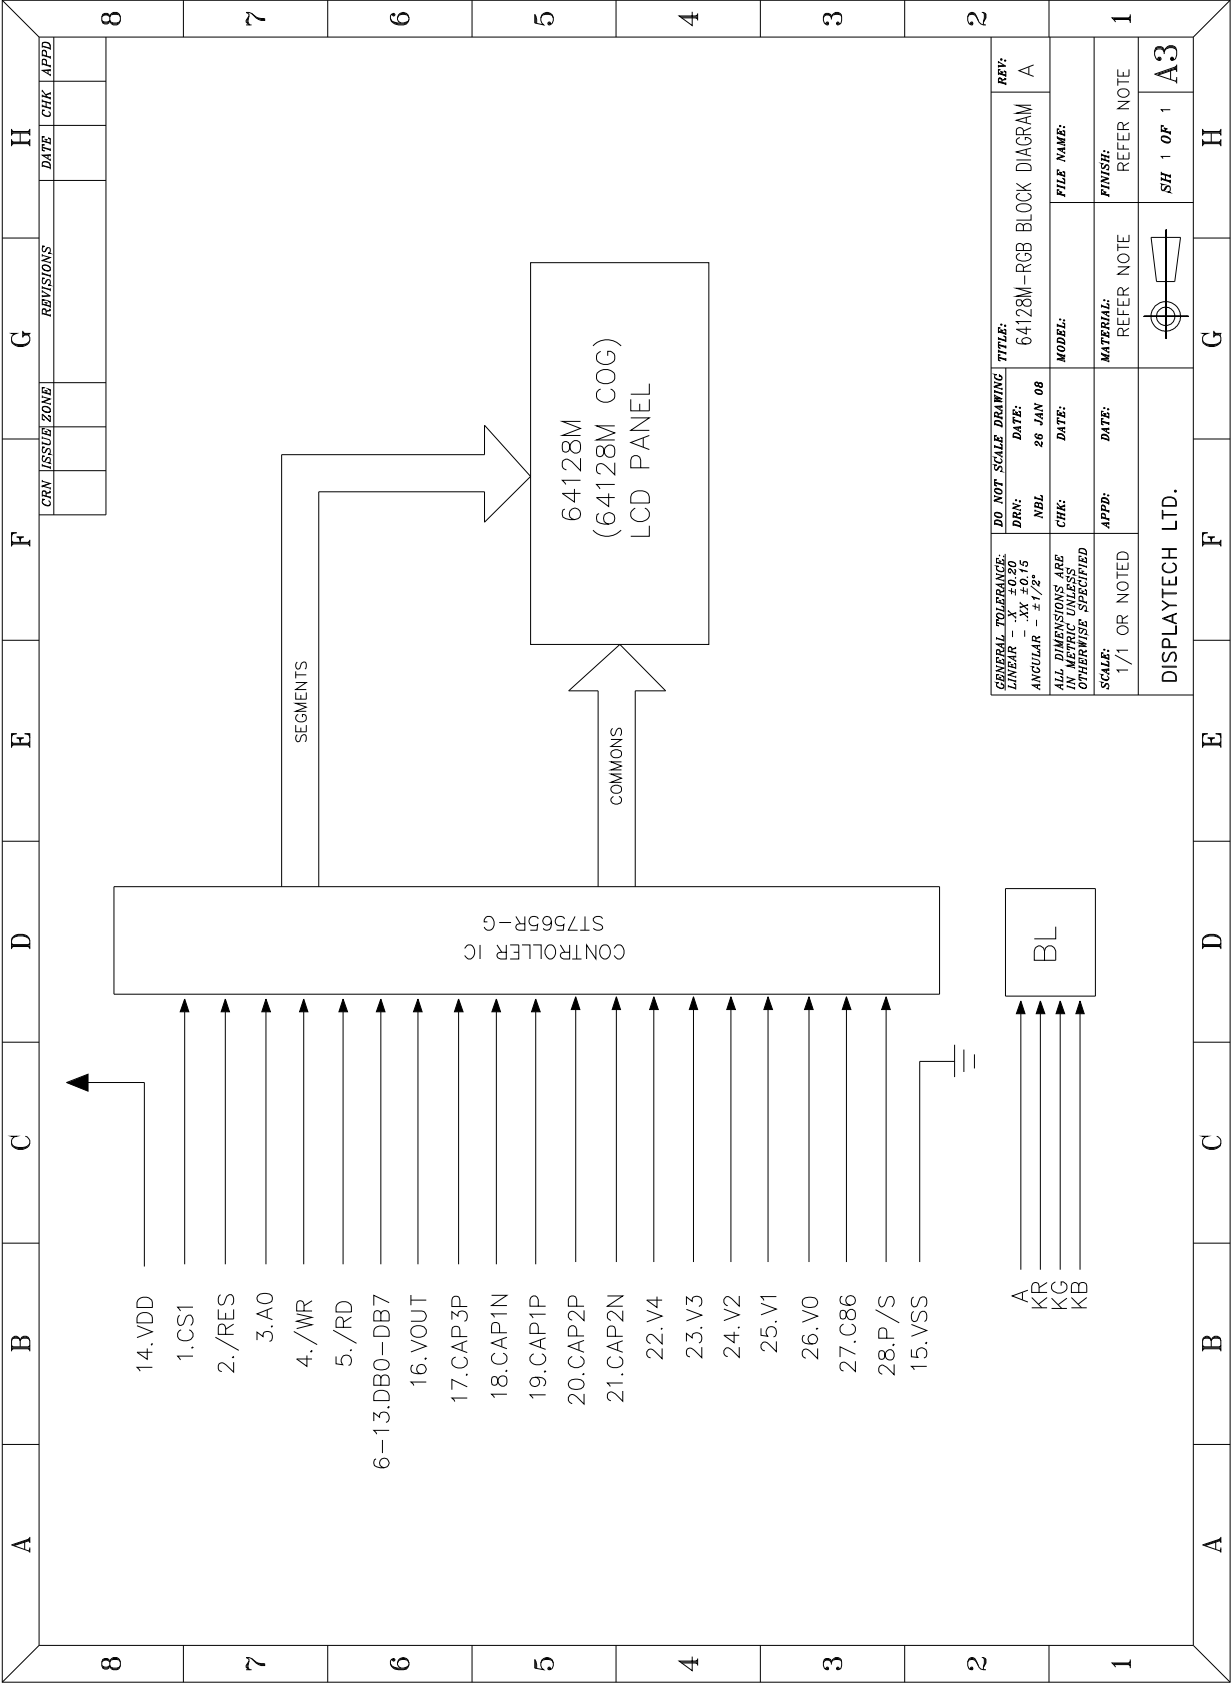Voltage applied to all segments.

■ BLOCK DIAGRAM



Technical drawing of a 64x128 dot matrix LCD module, showing front and side views with dimensions and specifications.

DOTS: 64X128

Dimensions (mm):

- Overall Width: 77.40±0.30
- Overall Height: 52.40±0.30
- Panel Width: 75.00±0.20
- Panel Height: 45.00±0.20
- Pin Pitch: 0.50±0.20
- Pin 1 to Pin 28: 21.55±0.30
- Pin 28 to Pin 29: 0.90±0.37
- Pin 29 to Pin 30: 0.90±0.37
- Pin 30 to Pin 31: 0.90±0.37
- Pin 31 to Pin 32: 0.90±0.37
- Pin 32 to Pin 33: 0.90±0.37
- Pin 33 to Pin 34: 0.90±0.37
- Pin 34 to Pin 35: 0.90±0.37
- Pin 35 to Pin 36: 0.90±0.37
- Pin 36 to Pin 37: 0.90±0.37
- Pin 37 to Pin 38: 0.90±0.37
- Pin 38 to Pin 39: 0.90±0.37
- Pin 39 to Pin 40: 0.90±0.37
- Pin 40 to Pin 41: 0.90±0.37
- Pin 41 to Pin 42: 0.90±0.37
- Pin 42 to Pin 43: 0.90±0.37
- Pin 43 to Pin 44: 0.90±0.37
- Pin 44 to Pin 45: 0.90±0.37
- Pin 45 to Pin 46: 0.90±0.37
- Pin 46 to Pin 47: 0.90±0.37
- Pin 47 to Pin 48: 0.90±0.37
- Pin 48 to Pin 49: 0.90±0.37
- Pin 49 to Pin 50: 0.90±0.37
- Pin 50 to Pin 51: 0.90±0.37
- Pin 51 to Pin 52: 0.90±0.37
- Pin 52 to Pin 53: 0.90±0.37
- Pin 53 to Pin 54: 0.90±0.37
- Pin 54 to Pin 55: 0.90±0.37
- Pin 55 to Pin 56: 0.90±0.37
- Pin 56 to Pin 57: 0.90±0.37
- Pin 57 to Pin 58: 0.90±0.37
- Pin 58 to Pin 59: 0.90±0.37
- Pin 59 to Pin 60: 0.90±0.37
- Pin 60 to Pin 61: 0.90±0.37
- Pin 61 to Pin 62: 0.90±0.37
- Pin 62 to Pin 63: 0.90±0.37
- Pin 63 to Pin 64: 0.90±0.37
- Pin 64 to Pin 65: 0.90±0.37
- Pin 65 to Pin 66: 0.90±0.37
- Pin 66 to Pin 67: 0.90±0.37
- Pin 67 to Pin 68: 0.90±0.37
- Pin 68 to Pin 69: 0.90±0.37
- Pin 69 to Pin 70: 0.90±0.37
- Pin 70 to Pin 71: 0.90±0.37
- Pin 71 to Pin 72: 0.90±0.37
- Pin 72 to Pin 73: 0.90±0.37
- Pin 73 to Pin 74: 0.90±0.37
- Pin 74 to Pin 75: 0.90±0.37
- Pin 75 to Pin 76: 0.90±0.37
- Pin 76 to Pin 77: 0.90±0.37
- Pin 77 to Pin 78: 0.90±0.37
- Pin 78 to Pin 79: 0.90±0.37
- Pin 79 to Pin 80: 0.90±0.37
- Pin 80 to Pin 81: 0.90±0.37
- Pin 81 to Pin 82: 0.90±0.37
- Pin 82 to Pin 83: 0.90±0.37
- Pin 83 to Pin 84: 0.90±0.37
- Pin 84 to Pin 85: 0.90±0.37
- Pin 85 to Pin 86: 0.90±0.37
- Pin 86 to Pin 87: 0.90±0.37
- Pin 87 to Pin 88: 0.90±0.37
- Pin 88 to Pin 89: 0.90±0.37
- Pin 89 to Pin 90: 0.90±0.37
- Pin 90 to Pin 91: 0.90±0.37
- Pin 91 to Pin 92: 0.90±0.37
- Pin 92 to Pin 93: 0.90±0.37
- Pin 93 to Pin 94: 0.90±0.37
- Pin 94 to Pin 95: 0.90±0.37
- Pin 95 to Pin 96: 0.90±0.37
- Pin 96 to Pin 97: 0.90±0.37
- Pin 97 to Pin 98: 0.90±0.37
- Pin 98 to Pin 99: 0.90±0.37
- Pin 99 to Pin 100: 0.90±0.37
- Pin 100 to Pin 101: 0.90±0.37
- Pin 101 to Pin 102: 0.90±0.37
- Pin 102 to Pin 103: 0.90±0.37
- Pin 103 to Pin 104: 0.90±0.37
- Pin 104 to Pin 105: 0.90±0.37
- Pin 105 to Pin 106: 0.90±0.37
- Pin 106 to Pin 107: 0.90±0.37
- Pin 107 to Pin 108: 0.90±0.37
- Pin 108 to Pin 109: 0.90±0.37
- Pin 109 to Pin 110: 0.90±0.37
- Pin 110 to Pin 111: 0.90±0.37
- Pin 111 to Pin 112: 0.90±0.37
- Pin 112 to Pin 113: 0.90±0.37
- Pin 113 to Pin 114: 0.90±0.37
- Pin 114 to Pin 115: 0.90±0.37
- Pin 115 to Pin 116: 0.90±0.37
- Pin 116 to Pin 117: 0.90±0.37
- Pin 117 to Pin 118: 0.90±0.37
- Pin 118 to Pin 119: 0.90±0.37
- Pin 119 to Pin 120: 0.90±0.37
- Pin 120 to Pin 121: 0.90±0.37
- Pin 121 to Pin 122: 0.90±0.37
- Pin 122 to Pin 123: 0.90±0.37
- Pin 123 to Pin 124: 0.90±0.37
- Pin 124 to Pin 125: 0.90±0.37
- Pin 125 to Pin 126: 0.90±0.37
- Pin 126 to Pin 127: 0.90±0.37
- Pin 127 to Pin 128: 0.90±0.37
- Pin 128 to Pin 129: 0.90±0.37
- Pin 129 to Pin 130: 0.90±0.37
- Pin 130 to Pin 131: 0.90±0.37
- Pin 131 to Pin 132: 0.90±0.37
- Pin 132 to Pin 133: 0.90±0.37
- Pin 133 to Pin 134: 0.90±0.37
- Pin 134 to Pin 135: 0.90±0.37
- Pin 135 to Pin 136: 0.90±0.37
- Pin 136 to Pin 137: 0.90±0.37
- Pin 137 to Pin 138: 0.90±0.37
- Pin 138 to Pin 139: 0.90±0.37
- Pin 139 to Pin 140: 0.90±0.37
- Pin 140 to Pin 141: 0.90±0.37
- Pin 141 to Pin 142: 0.90±0.37
- Pin 142 to Pin 143: 0.90±0.37
- Pin 143 to Pin 144: 0.90±0.37
- Pin 144 to Pin 145: 0.90±0.37
- Pin 145 to Pin 146: 0.90±0.37
- Pin 146 to Pin 147: 0.90±0.37
- Pin 147 to Pin 148: 0.90±0.37
- Pin 148 to Pin 149: 0.90±0.37
- Pin 149 to Pin 150: 0.90±0.37
- Pin 150 to Pin 151: 0.90±0.37
- Pin 151 to Pin 152: 0.90±0.37
- Pin 152 to Pin 153: 0.90±0.37
- Pin 153 to Pin 154: 0.90±0.37
- Pin 154 to Pin 155: 0.90±0.37
- Pin 155 to Pin 156: 0.90±0.37
- Pin 156 to Pin 157: 0.90±0.37
- Pin 157 to Pin 158: 0.90±0.37
- Pin 158 to Pin 159: 0.90±0.37
- Pin 159 to Pin 160: 0.90±0.37
- Pin 160 to Pin 161: 0.90±0.37
- Pin 161 to Pin 162: 0.90±0.37
- Pin 162 to Pin 163: 0.90±0.37
- Pin 163 to Pin 164: 0.90±0.37
- Pin 164 to Pin 165: 0.90±0.37
- Pin 165 to Pin 166: 0.90±0.37
- Pin 166 to Pin 167: 0.90±0.37
- Pin 167 to Pin 168: 0.90±0.37
- Pin 168 to Pin 169: 0.90±0.37
- Pin 169 to Pin 170: 0.90±0.37
- Pin 170 to Pin 171: 0.90±0.37
- Pin 171 to Pin 172: 0.90±0.37
- Pin 172 to Pin 173: 0.90±0.37
- Pin 173 to Pin 174: 0.90±0.37
- Pin 174 to Pin 175: 0.90±0.37
- Pin 175 to Pin 176: 0.90±0.37
- Pin 176 to Pin 177: 0.90±0.37
- Pin 177

Technical drawing of a rectangular panel, likely a display or sensor array, showing dimensions and labels.

Dimensions:

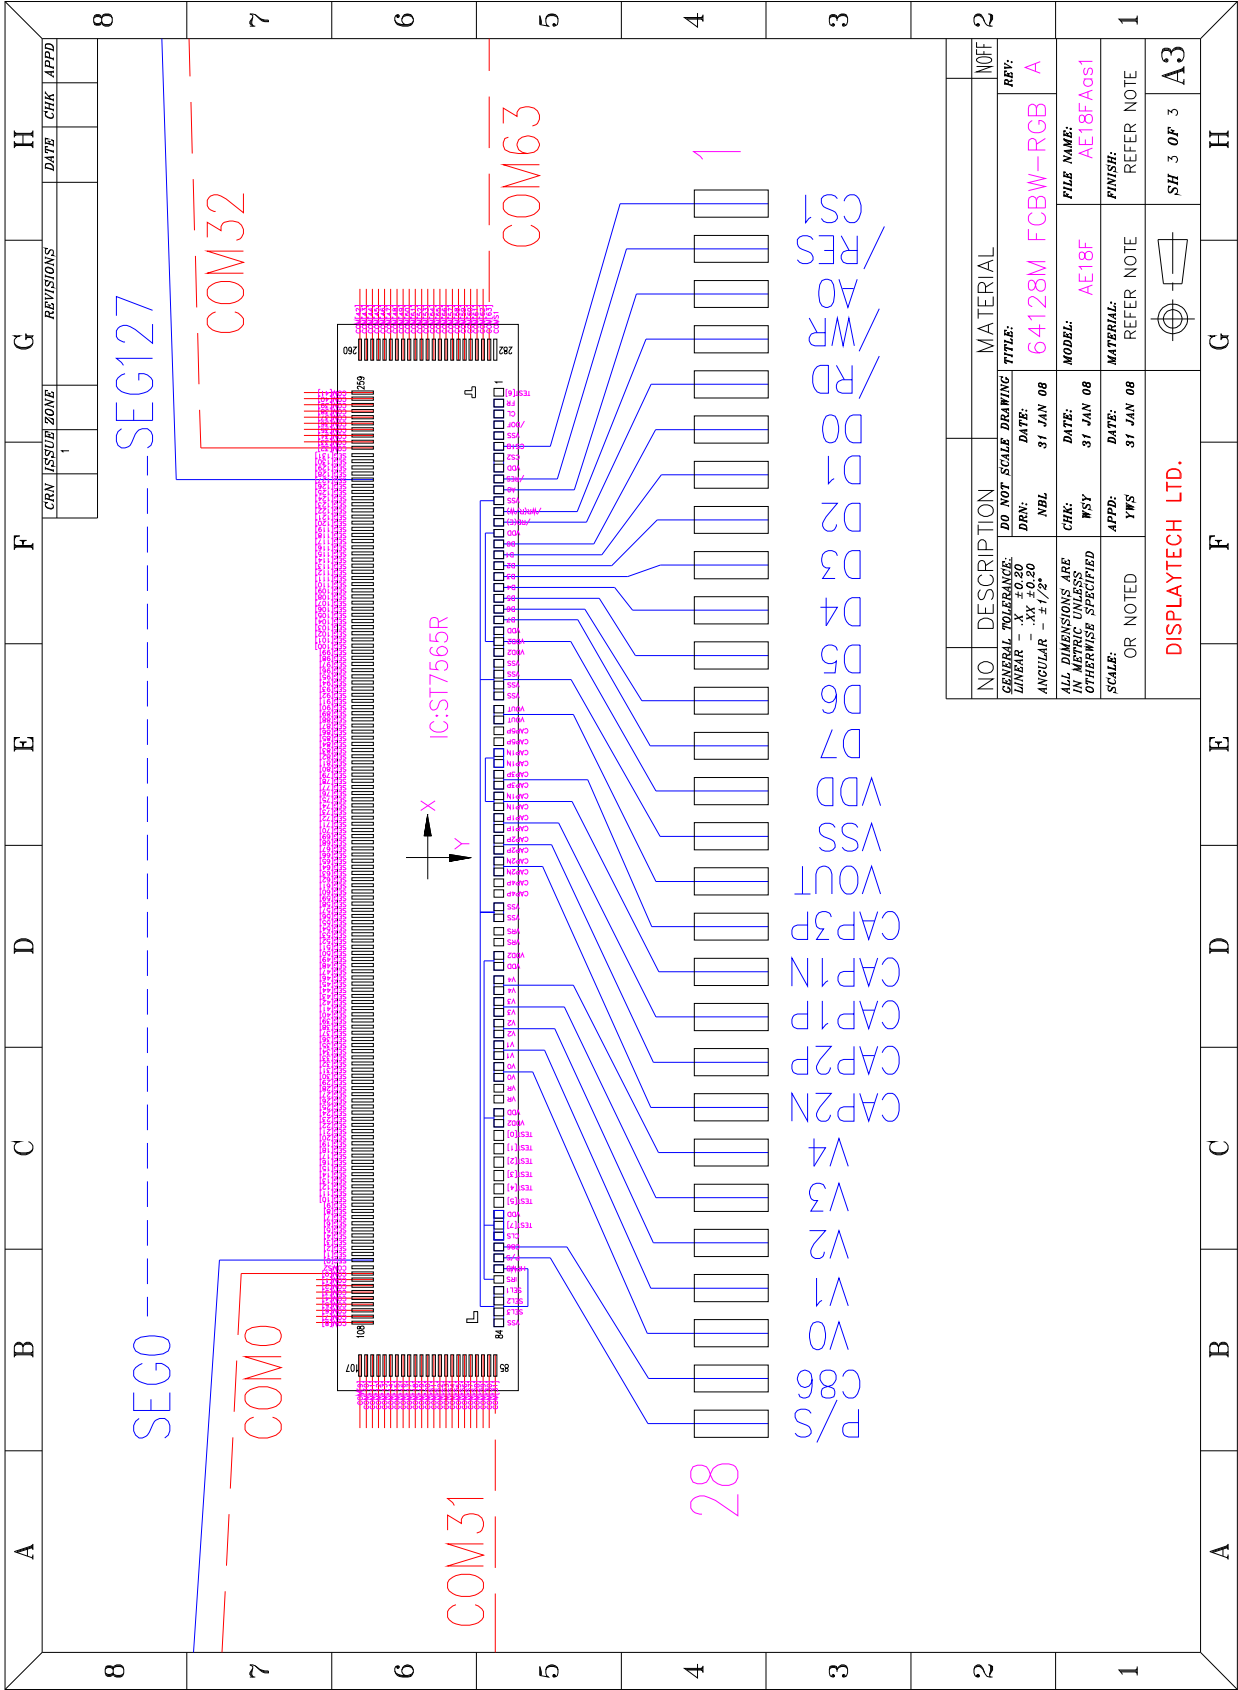
- Overall width: 28" (indicated by a dimension line and the number 28)
- Overall height: 64" (indicated by a dimension line and the number 64)
- Panel width: 28" (indicated by a dimension line and the number 28)
- Panel height: 64" (indicated by a dimension line and the number 64)

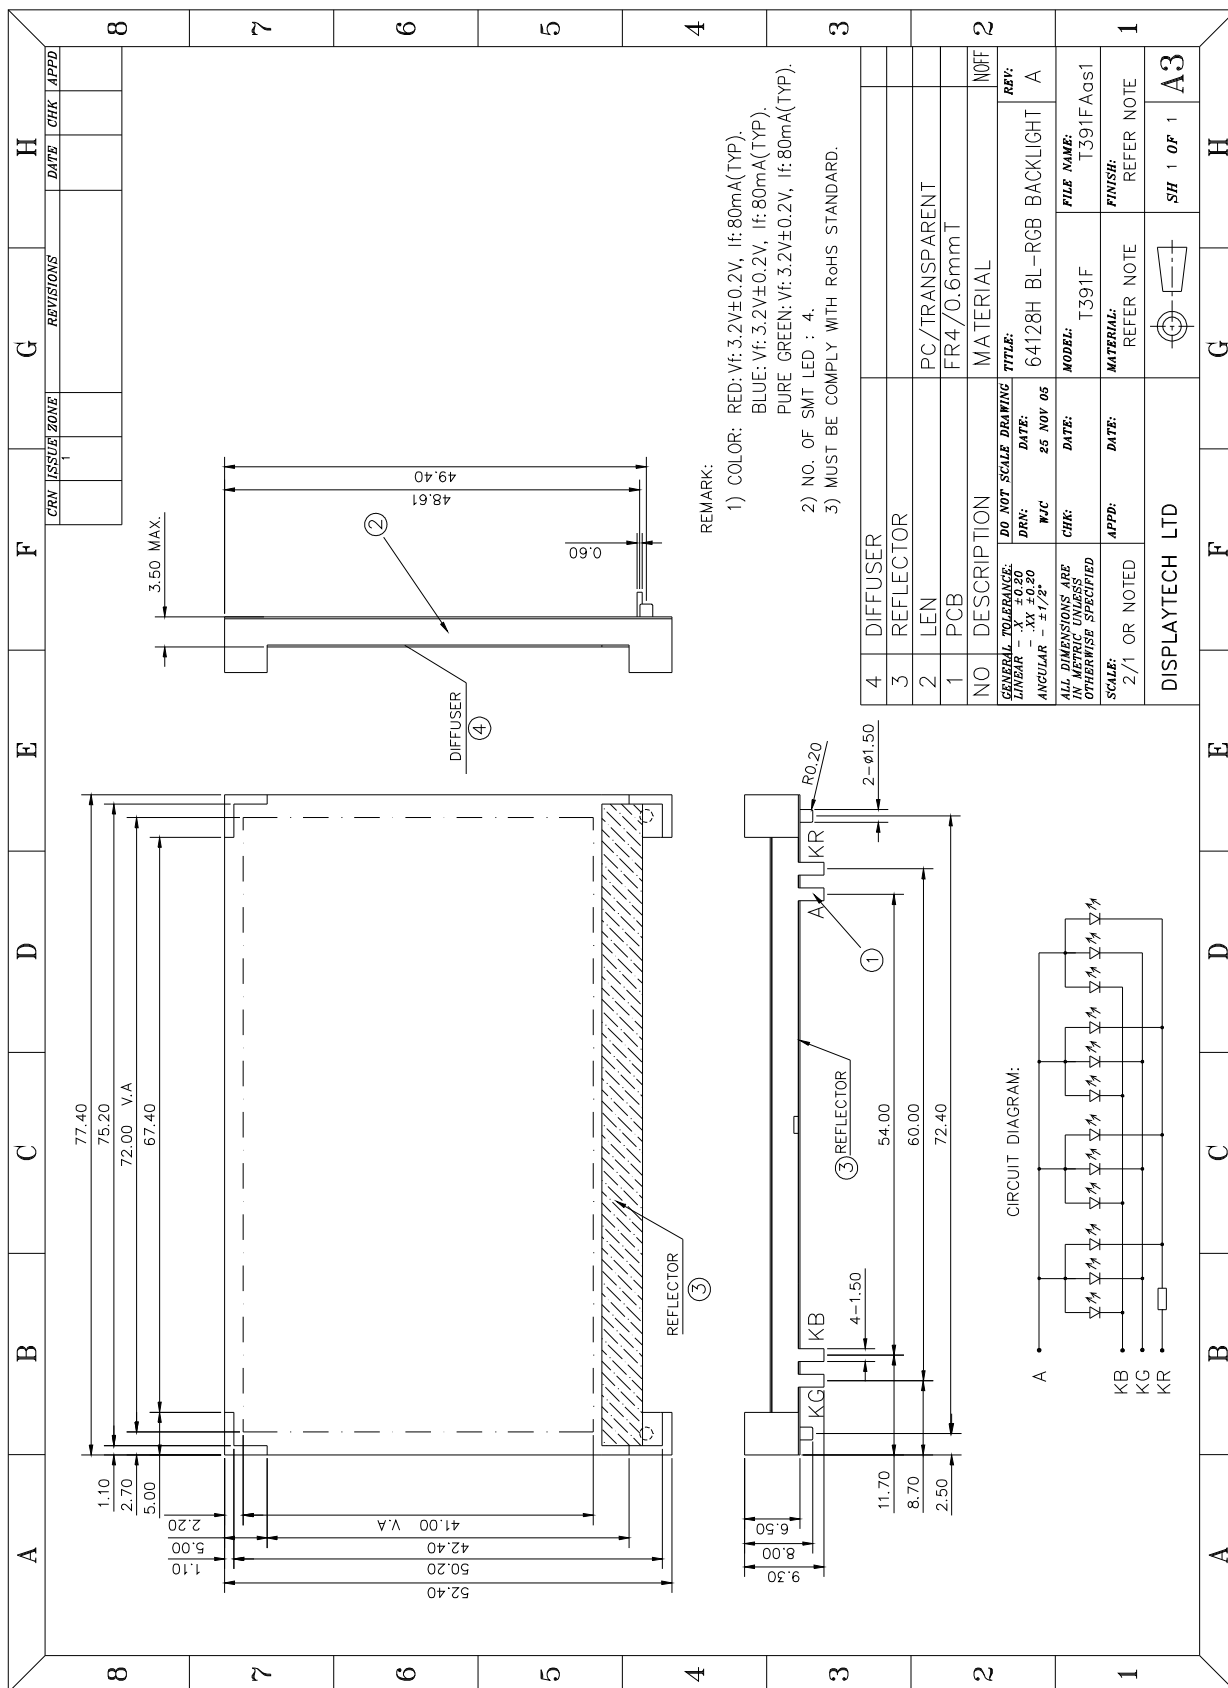
Labels:

- COM0, COM1, COM2, COM3 (located along the top edge)
- SEG1, SEG2, SEG3, SEG4, SEG5, SEG6, SEG7, SEG8, SEG9, SEG10, SEG11, SEG12, SEG13, SEG14, SEG15, SEG16, SEG17, SEG18, SEG19, SEG20, SEG21, SEG22, SEG23, SEG24, SEG25, SEG26, SEG27, SEG28 (located along the right edge)
- COM0, COM1, COM2, COM3 (located along the bottom edge)
- SEG1, SEG2, SEG3, SEG4, SEG5, SEG6, SEG7, SEG8, SEG9, SEG10, SEG11, SEG12, SEG13, SEG14, SEG15, SEG16, SEG17, SEG18, SEG19, SEG20, SEG21, SEG22, SEG23, SEG24, SEG25, SEG26, SEG27, SEG28 (located along the left edge)

Notes:

- ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED
- SCALE: 2/1 OR NOTED
- DATE: 31 JAN 08
- APPROVED: [Signature]
- BY: [Signature]
- DATE: 31 JAN 08
- CHK: [Signature]
- DATE: 31 JAN 08
- DRN: [Signature]
- DATE: 31 JAN 08
- DO NOT SCALE DRAWING
- TITLE: 64" 28" FCBW-RGB A
- REV: [Signature]





■ BACKLIGHT SPECIFICATION

◆ MECHANICAL SPECIFICATIONS


ITEM	NOMINAL DIMENSIONS	UNIT
OUTLINE SIZE (LxWxH)	77.40 x 52.40x 9.30	mm
VIEWING AREA (LxW)	72.00 x 41.00	mm
CONTACT PIN PITCH/LENGTH	NIL	mm
NO.OF LED SMT	4	---

◆ ELECTRICAL/OPTICAL CHARACTERISTICS (Ta=25°C, If=80mA typ.)


MODE	PARAMETER			UNIT
COLOR	RED	PURE GREEN	BLUE	---
CHROMATICITY COORDINATE	X=0.6933 Y=0.3000	X=0.1964 Y=0.7334	X=0.1415 Y=0.0619	---
FORWARD VOLTAGE (Vf)	3.2 typ	3.2 typ	3.2 typ	V
FORWARD CURRENT (If)	80	80	80	mA
AVERAGE LUMINOUS INTENSITY (Iv)	23	126	50	cd/m ²

◆ ABSOLUTE MAXIMUM RATING

ITEM	RED	PURE GREEN	BLUE	UNIT
FORWARD CURRENT	120mA	120mA	120mA	If
REVERSE VOLTAGE	5V	5V	5V	Vr
POWER DISSIPATION	384mW	384mW	384mW	Pd
OPERATING TEMPERATURE	-20°C TO 70°C			Top
STORAGE TEMPERATURE	-30°C TO 80°C			Tstg



TESTING POINT

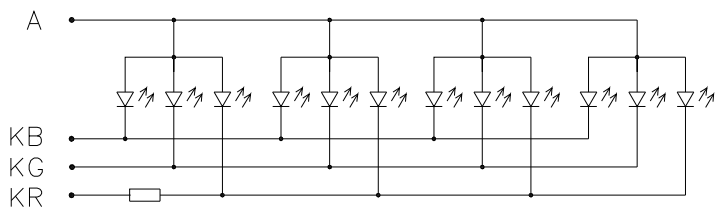

CIRCUIT DIAGRAM

REMARK:

1. AVERAGE LUMINOUS INTENSITY IS THE AVERAGE VALUE OF THE NINE INDICATED POINTS AS SHOWN.
2. MEASUREMENT INSTRUMENT: BM-7, APERTURE: Ø10mm.

■ QUALITY GUARANTEE

◆ **PURPOSE:** It is to define the inspection standard of LCD modules

◆ PRODUCT STANDARD

1) INSPECTION AND TEST

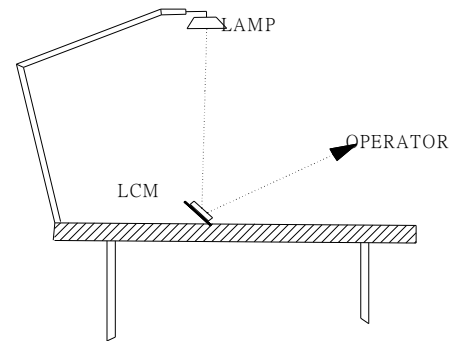
- FUNCTION TEST
- APPEARANCE INSPECTION
- PACKING SPECIFICATION

2) INSPECTION CONDITION


- Put under the lamp (20w×2) at a distance 100mm from the LCD Modules.
- Tilt upright 45 degree by the front (back) to inspect LCD appearance.

3) AQL INSPECTION LEVEL

- SAMPLING METHOD : MIL-STD-105D
- SAMPLING PLAN : SINGLE
- MAJOR DEFECT : 0.65% (MAJOR)
- MINOR DEFECT : 2.5% (MINOR)
- GENERAL LEVEL : II/NORMAL









◆ DISPLAY AREA DEFINITION:

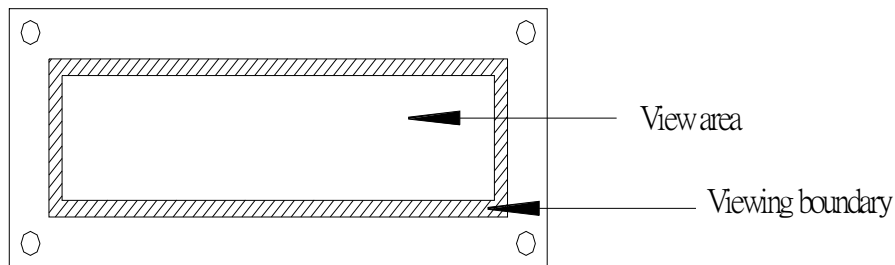




◆ INSPECTION STANDARD

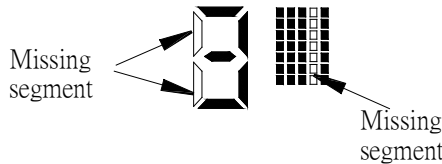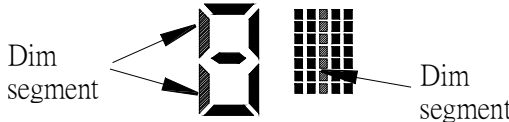
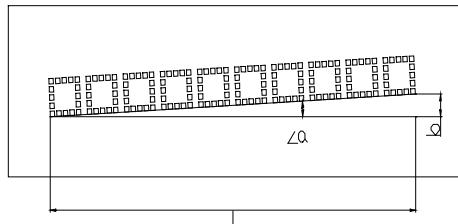

1) FUNCTIONAL TEST STANDARD








Item	Inspection Standard Description			Standard	Defect type		
1	LCD has no display			Reject	MAJ		
2	LCM display do not change			Reject	MAJ		
3	Display wrong pattern			Reject	MAJ		
4	Display segment open			Reject	MAJ		
5	Display dim segment			Reject	MAJ		
6	Wrong LCD viewing direction			Reject	MAJ		
7	Dim Display			See sample	MAJ		
8	LCD color variation			See sample	MAJ		
9			Acceptable range		Accept		
			L	<a			b
			≥ 20mm	0.43°			≤ 0.15mm
			≥ 30mm	0.38°			≤ 0.2mm
			≥ 40mm	0.43°			≤ 0.3mm
			≥ 50mm	0.40°			≤ 0.35mm
			≥ 60mm	0.43°			≤ 0.45mm
			≥ 70mm	0.41°			≤ 0.50mm
			≥ 80mm	0.43°			≤ 0.60mm
			≥ 90mm	0.41°			≤ 0.65mm
			≥ 100mm	0.43°			≤ 0.75mm
10	LCD display Pin hole		Standard		Accept		
			$\varnothing = \frac{x+y}{2}$	QTY			
			$\varnothing \leq 0.25$	1			
			$\varnothing > 0.25$	1			
			$\varnothing < \frac{1}{4} W$	1			
			$\varnothing > \frac{1}{4} W$	1			
			Reject	MIN			





Item	Inspection Standard Description					Standard	Defect type
11	LCD display Broken segment(dots)		Standard				
			X	y	QTY		
			$\geq \frac{1}{4}b$	$\geq \frac{1}{4}a$	1	Reject	MIN
			(X or y) $\geq 0.2\text{mm}$		1	Reject	MIN
			$\leq \frac{1}{4}b$	$\leq \frac{1}{4}a$	1	Accept	
			$\leq \frac{1}{5}b$	$\leq \frac{1}{5}a$	2	Accept	
12	LCD display Black spot or White spot		$\varnothing = \frac{x+y}{2}$		QTY		
			$\varnothing < 0.10$			Accept	
			$0.1 < \varnothing \leq 0.20$		2	Accept	
			$0.20 \leq \varnothing < 0.25$		1	Accept	
			$0.25 < \varnothing \leq 0.4$		0	Reject	MIN
			$\varnothing > 0.4$		0	Reject	MAJ
13	LCD display excess black line or white line	Black line/white line(Lxw)mm			QTY		
		$(L \leq 1.0) \times (W \leq 0.025)$			2	Accept	
		$(1.0 < L \leq 1.5) \times (W \leq 0.025)$			1	Accept	
		$(L > 1.5) \times (W \leq 0.025)$			0	Reject	MIN
		$(L > 2) \times (W > 0.025)$			0	Reject	MAJ
14	Backlight not function					Reject	MAJ
15	LED not function or dim					Reject	MIN
16	Backlight defect (dirt, scratch)					Reject	MIN

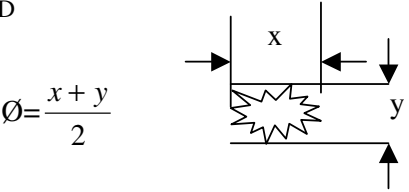2) COSMETIC INSPECTION STANDARD

Item	Standard description of inspection				Standard	Defect type
1	LCD inspection item					
1.1	LCD color variation				See sample	MIN
1.2	LCD broken				Reject	MAJ
1.3	Wrong polarizer of LCD				Reject	MAJ
1.4	Spot on LCD surface				Reject	MAJ
1.5	Scratch on LCD		Scratch = Ø		QTY	
			$\frac{x+y}{2} < 0.1$		Except	Accept
			$0.1 \leq \frac{x+y}{2} \leq 0.15$		2	Accept
			$0.15 < \frac{x+y}{2} \leq 0.25$		1	Accept
			$\frac{x+y}{2} > 0.25$		1	Reject MIN
1.6	LCD scratch		Scratch = L	scratch = W	QTY	
				$W \leq 0.015$		Accept
			< 0.5	$W \leq 0.02$	2	Accept
			< 1.0	$W \leq 0.03$	1	Accept
			≥ 1.0	$W \geq 0.03$	1	Reject MIN
1.7	White or black spot on LCD				QTY	
			$\frac{x+y}{2} < 0.1$			Accept
			$0.1 \leq \frac{x+y}{2} < 0.2$		2	Accept
			$0.2 \leq \frac{x+y}{2} \leq 0.25$		1	Accept
			$\frac{x+y}{2} > 0.25$		1	Reject MIN
			Bevy point		-	Reject MIN

Item	Standard description of inspection				Standard	Defect type
1.8	Black line in JCD 	(L)	(W)	QTY		
		$L \leq 1.0$	$W \leq 0.025$	2	Accept	
		$1.0 < L \leq 1.5$	$W \leq 0.025$	1	Accept	
		$1.5 < L$	$W > 0.025$	1	Reject	MIN
1.9	Round air bubble	Size	QTY			
		$\varnothing < 0.15$	2	Accept		
		$0.15 \leq \varnothing \leq 0.25$	1	Accept		
		$\varnothing > 0.25$	0	Reject	MIN	
1.10	Line defect	(L)	(W)	QTY		
		$L < 0.5$	$W < 0.02$	2	Accept	
		$L < 1.0$	$W < 0.03$	1	Accept	
		$L \geq 1.0$	$W \geq 0.3$	0	Reject	MIN
1.11	Finger print				Reject	MIN
2	PCB/COB specification					
2.1	PCB deformity 	L	H			
		$\leq 6.0\text{mm}$	$\leq 1.5\text{mm}$	Accept		
		$> 6.0\text{mm}$	$\leq 1.5\text{mm}$	Reject	MIN	
		$< 6.0\text{mm}$	$> 1.5\text{mm}$	Reject	MIN	
		$> 6.0\text{mm}$	$> 1.5\text{mm}$	Reject	MIN	
2.2	Deformity at PCB edge, damage circuit.				Reject	MAJ
2.3	Convex at PCB edge 	L	H			
		$\leq 6.0\text{mm}$	$\leq 1.5\text{mm}$	Accept		
		$> 6.0\text{mm}$	$\leq 1.5\text{mm}$	Reject	MIN	
		$< 6.0\text{mm}$	$> 1.5\text{mm}$	Reject	MIN	
		$> 6.0\text{mm}$	$> 1.5\text{mm}$	Reject	MIN	
2.4	Damage excess 2x2mm at the PCB corner				Reject	MIN
2.5	Scratch on PCB surface				See sample	MIN
2.6	Scratch on PCB coat/leakage coat on PCB surface				Reject	MAJ
2.7	Open circuit				Reject	MAJ
2.8	PCB PTH open				Reject	MAJ
2.9	Repair PCB PTH	$QTY \leq 2\text{PCS}$		Accept		
		$QTY \geq 3\text{PCS}$		Reject	MAJ	
2.10	Color different from one side to another side.				Reject	MIN
2.11	Repaired solder mask area	$\leq 30\text{mm}^2$		Accept		
		$\geq 30\text{mm}^2$		Reject	MIN	
2.12	Scratch circuit, damage Circuit 	$a \leq 1/2w$ or $b < w$		Accept		
		$a > 1/2w$ or $b > w$		Reject		
3	Bezel specification					
3.1	Wrong Materials					MAJ
3.2	Incorrect dimension					MAJ
3.3	Bezel broken					MAJ
3.4	Rust on Bezel					MAJ
3.5	Hole or dirty on oil Paint surface		Size	cm^2/per		
		Top surface	$\varnothing \leq 0.3$	2	Accept	
			$0.3 < \varnothing \leq 0.5$	1	Accept	
			$\varnothing > 0.5$	0	Reject	MIN
		Side	$\varnothing \leq 0.5$	2	Accept	
			$0.5 < \varnothing \leq 0.8$	1	Accept	
			$\varnothing > 0.8$	0	Reject	MIN

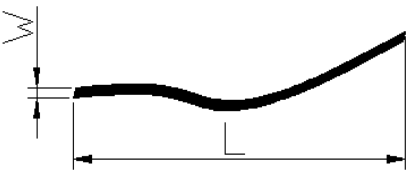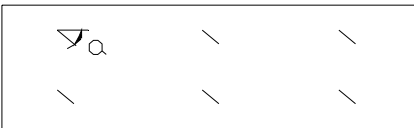Item	Standard description of inspection				Standard	Defect type
3.6	Bezel bow or twist		$h \leq 0.01 \text{ mm/mm}$		Accept	
			$h > 0.01 \text{ mm/mm}$		Reject	MIN
3.7			$d1 - d2 \leq \text{tolerance}$		Accept	
			$d1 - d2 > \text{tolerance}$		Reject	MIN
3.8	Scratch on bezel 		Face		Accept QTY	
			L	W	Not defined	See Sample
			-	$W \leq 0.15$		
			$L \leq 3$	$W \leq 0.20$	2	
			$L \leq 2$	$W \leq 0.3$	2	
			-	$W > 0.3$		
			side		Accept QTY	
			L	W		See Sample
			-	$W \leq 0.2$	except	
			$L \leq 3$	$W \leq 0.25$	2	
			$L \leq 2$	$W \leq 0.3$	2	
3.9	Twist angle $\alpha = 45^\circ \pm 5^\circ$				Accept	
3.10	Void gap between bezel and PCB				Reject	MIN
3.11	Bezel clip incorrectly 				Reject	MIN
4 Solder specification						
4.1	Wrong component				Reject	MAJ
4.2	Broken component				Reject	MAJ
4.3	Mis-alignment 		Component legs extend beyond the pad and Legs > pad distance(w) on solder area > W^2		Accept	
			Component legs extend beyond the pad and Legs > pad distance(w) on solder area < W^2		Reject	MIN
	Component Offset 		Solder legs offset distance $L < \text{solder legs } 1/4W$		Accept	
			Solder legs offset $L > 1/4W$		Reject	MIN
4.4	Component assembly defect 				Reject	MIN
4.5	CHIP components hoist $\leq 0.5\text{mm}$				Accept	
4.6	CHIP components hoist $> 0.5\text{mm}$				Reject	MIN

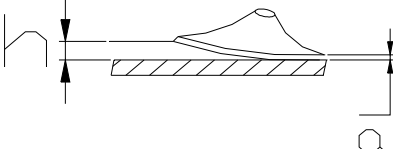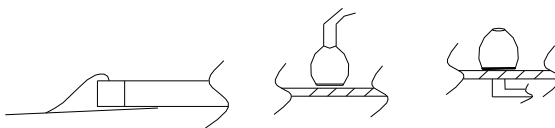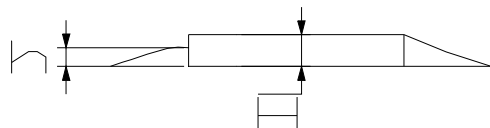Item	Standard description of inspection	Standard	Defect type
4.7	Components hoist	$h \leq 2.0\text{mm}$	Accept
		$h > 2.0\text{mm}$	Reject MIN
4.8	Switch (socket) hoist	$h \leq 0.5\text{mm}$	Accept
		$h > 0.5\text{mm}$	Reject MIN
4.9	Components cold solder or incomplete solder	Reject	MAJ
4.10	Solder PAD tilt up, but height (h) less than Solder PAD thickness (a) 	Accept	
4.11	Excess solder above components 	Reject	Min
4.12	Insufficient solder below components height or less than diameter 	Reject	MIN
4.13	Solder area less than soldering PAD Area by 2/3	Reject	MIN
4.14	Trimmed pin length beyond 0.09inch (2.3mm) 	Reject	Min
5	Packing specification		
5.1	Wrong carton mark .	Reject	MAJ
5.2	Carton mark problem	Reject	MIN
5.3	Carton damage extend than 150mm	Reject	MAJ
5.4	Carton damage, scratch more 50mm, less 150mm.	Reject	MIN

■ PRECAUTIONS FOR USING LCD MODULES

◆ HANDLING PRECAUTIONS

1. This device is susceptible to Electro-Static Discharge (ESD) damage. Observe Anti-Static precautions.
2. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it or impact.
3. If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
4. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
5. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
6. If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents :
 - Isopropyl alcohol
 - Ethyl alcohol
7. Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.
 - Water
 - Ketone
 - Aromatic solvents
8. Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
9. Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
10. Do not attempt to disassemble or process the LCD module.
11. NC terminal should be open. Do not connect anything.
12. If the logic circuit power is off, do not apply the input signals.
13. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling the LCD modules.
 - Tools required for assembling, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.
 - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

◆ POWER SUPPLY PRECAUTIONS:

1. Identify and, at all times, observe absolute maximum ratings for both logic and LC drivers. Note that there is some variance between models.
2. Prevent the application of reverse polarity to VDD and VSS, however briefly.
3. Use a clean power source free from transients. Power-up conditions are occasionally “jolting” and may exceed the maximum ratings of the modules.
4. The VDD power of the module should also supply the power to all devices that may access the display. Don’t allow the data bus to be driven when the logic supply to the module is turned off.

◆ OPERATING PRECAUTIONS:

1. DO NOT plug or unplug the module when the system is powered up.
2. Minimize the cable length between the module and host MPU.
3. For models with EL backlights, do not disable the backlight by interrupting the HV line. Unload inverters produce voltage extremes that may arc within a cable or at the display.
4. Operate the module within the limits of the modules temperature specifications.

◆ MECHANICAL/ENVIRONMENTAL PRECAUTIONS:

1. Improper soldering is the major cause of module difficulty. Use of flux cleaner is not recommended as they may seep under the elastomeric connection and cause display failure.
2. Mount the module so that it is free from torque and mechanical stress.
3. Surface of the LCD panel should not be touched or scratched. The display front surface is an easily scratched, plastic polarizer. Avoid contact and clean only when necessary with soft, absorbent cotton dampened with petroleum benzene.
4. Always employ anti-static procedure while handling the module.
5. Prevent moisture build-up upon the module and observe the environmental constraints for storage temperature and humidity.
6. Do not store in direct sunlight
7. If leakage of the liquid crystal material should occur, avoid contact with this material, particularly ingestion. If the body or clothing becomes contaminated by the liquid crystal material, wash thoroughly with water and soap

◆ Storage Precautions

When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps. Keep the modules in bags (avoid high temperature / high humidity and low temperatures below 0°C). Whenever possible, the LCD modules should be stored in the same conditions in which they were shipped from our company.

◆ Others

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.

If the LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.

To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules.

- Exposed area of the printed circuit board.
- Terminal electrode sections.

■ USING LCD MODULES

◆ Liquid Crystal Display Modules

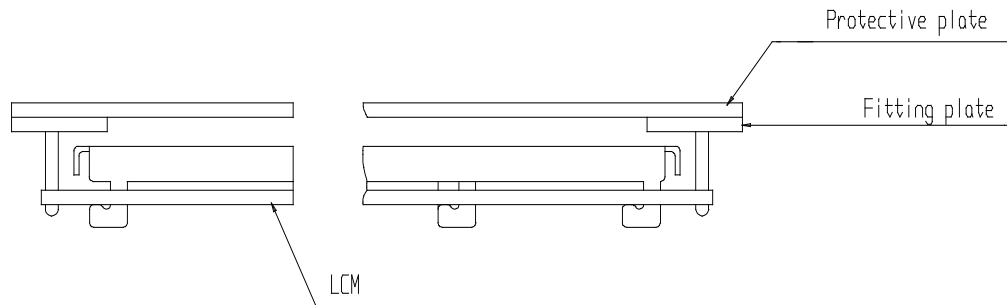
LCD is composed of glass and polarizer. Pay attention to the following items when handling.

1. Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.
2. Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.).
3. N-hexane is recommended for cleaning the adhesives used to attach front/rear polarizers and reflectors made of organic substances which will be damaged by chemicals such as acetone, toluene, ethanol and isopropylalcohol.
4. When the display surface becomes dusty, wipe gently with absorbent cotton or other soft material like chamois soaked in petroleum benzin. Do not scrub hard to avoid damaging the display surface.
5. Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading.
6. Avoid contacting oil and fats.
7. Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizers. After products are tested at low temperature they must be warmed up in a container before coming in contact with room temperature air.
8. Do not put or attach anything on the display area to avoid leaving marks on.
9. Do not touch the display with bare hands. This will stain the display area and degrade insulation between terminals (some cosmetics are determined to the polarizers).
10. As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring.

◆ Installing LCD Modules

The hole in the printed circuit board is used to fix LCM as shown in the picture below. Attend to the following items when installing the LCM.

1. Cover the surface with a transparent protective plate to protect the polarizer and LC cell.



2. When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be $\pm 0.1\text{mm}$.

◆ Precaution for Handling LCD Modules

Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.

1. Do not alter, modify or change the shape of the tab on the metal frame.
2. Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
3. Do not damage or modify the pattern writing on the printed circuit board.
4. Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
5. Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
6. Do not drop, bend or twist LCM.

◆ Electro-Static Discharge Control

Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC.

1. Make certain that you are grounded when handling LCM.
2. Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential.
3. When soldering the terminal of LCM, make certain the AC power source for the soldering iron does not leak.
4. When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
5. As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.
6. To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended.

◆ Precaution for soldering to the LCM

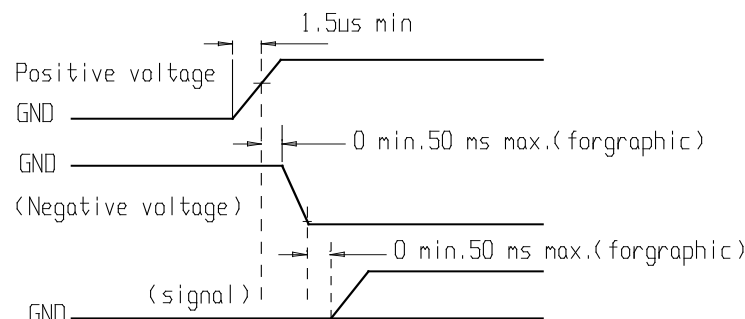
1. Observe the following when soldering lead wire, connector cable and etc. to the LCM.
 - Soldering iron temperature : $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$.
 - Soldering time : 3-4 sec.
 - Solder : eutectic solder.

If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.

2. When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.
3. When remove the electroluminescent panel from the PC board, be sure the solder has completely melted, the soldered pad on the PC board could be damaged.

◆ Precautions for Operation

1. Viewing angle varies with the change of liquid crystal driving voltage (VO). Adjust VO to show the best contrast.
2. Driving the LCD in the voltage above the limit shortens its life.
3. Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
4. If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.
5. Condensation on terminals can cause an electrochemical reaction disrupting the terminal circuit. Therefore, it must be used under the relative condition of 40°C , 50% RH.
6. When turning the power on, input each signal after the positive/negative voltage becomes stable.



◆ Storage

When storing LCDs as spares for some years, the following precaution are necessary.

1. Store them in a sealed polyethylene bag. If properly sealed, there is no need for desiccant.
2. Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C.
3. The polarizer surface should not come in contact with any other objects. (We advise you to store them in the container in which they were shipped.)
4. Environmental conditions :
 - Do not leave them for more than 168hrs. at 60°C.
 - Should not be left for more than 48hrs. at -20°C.

◆ Safety

1. It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.
2. If any liquid leaks out of a damaged glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

◆ Limited Warranty

Unless agreed between DISPLAYTECH and customer, DISPLAYTECH will replace or repair any of its LCD modules which are found to be functionally defective when inspected in accordance with DISPLAYTECH LCD acceptance standards (copies available upon request) for a period of one year from date of shipments. Cosmetic/visual defects must be returned to DISPLAYTECH within 90 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of DISPLAYTECH limited to repair and/or replacement on the terms set forth above. DISPLAYTECH will not be responsible for any subsequent or consequential events.

◆ Return LCM under warranty

No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are :

- Broken LCD glass.
- PCB eyelet's damaged or modified.
- PCB conductors damaged.
- Circuit modified in any way, including addition of components.
- PCB tampered with by grinding, engraving or painting varnish.
- soldering to or modifying the bezel in any manner.

Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB eyelet's, conductors and terminals.

■ REVISION RECORD

VERSION	CHANGES	DATE
1.0	Initial revision	7 April 2008
1.1	Power Supply for Logic and LCD inside ABSOLUTE MAXIMUM RATINGS was corrected	10 June 2008