


10.3 Connection diagram

H2	Hot water temperature probe 10 k Ω
M1	Fan motor DC Inverter
Y1	Water electrovalve (voltage output 230 V / 50 Hz / 1 A)
L-N	230 V/50 Hz electrical power supply connection
HRS	Water temperature probe 10 k Ω for RS models

RS	Wiring for RS model
AIR	Air temperature probe
FF	Output for mobile suction panel servomotors (power output at 230 V/50 Hz 1 A)

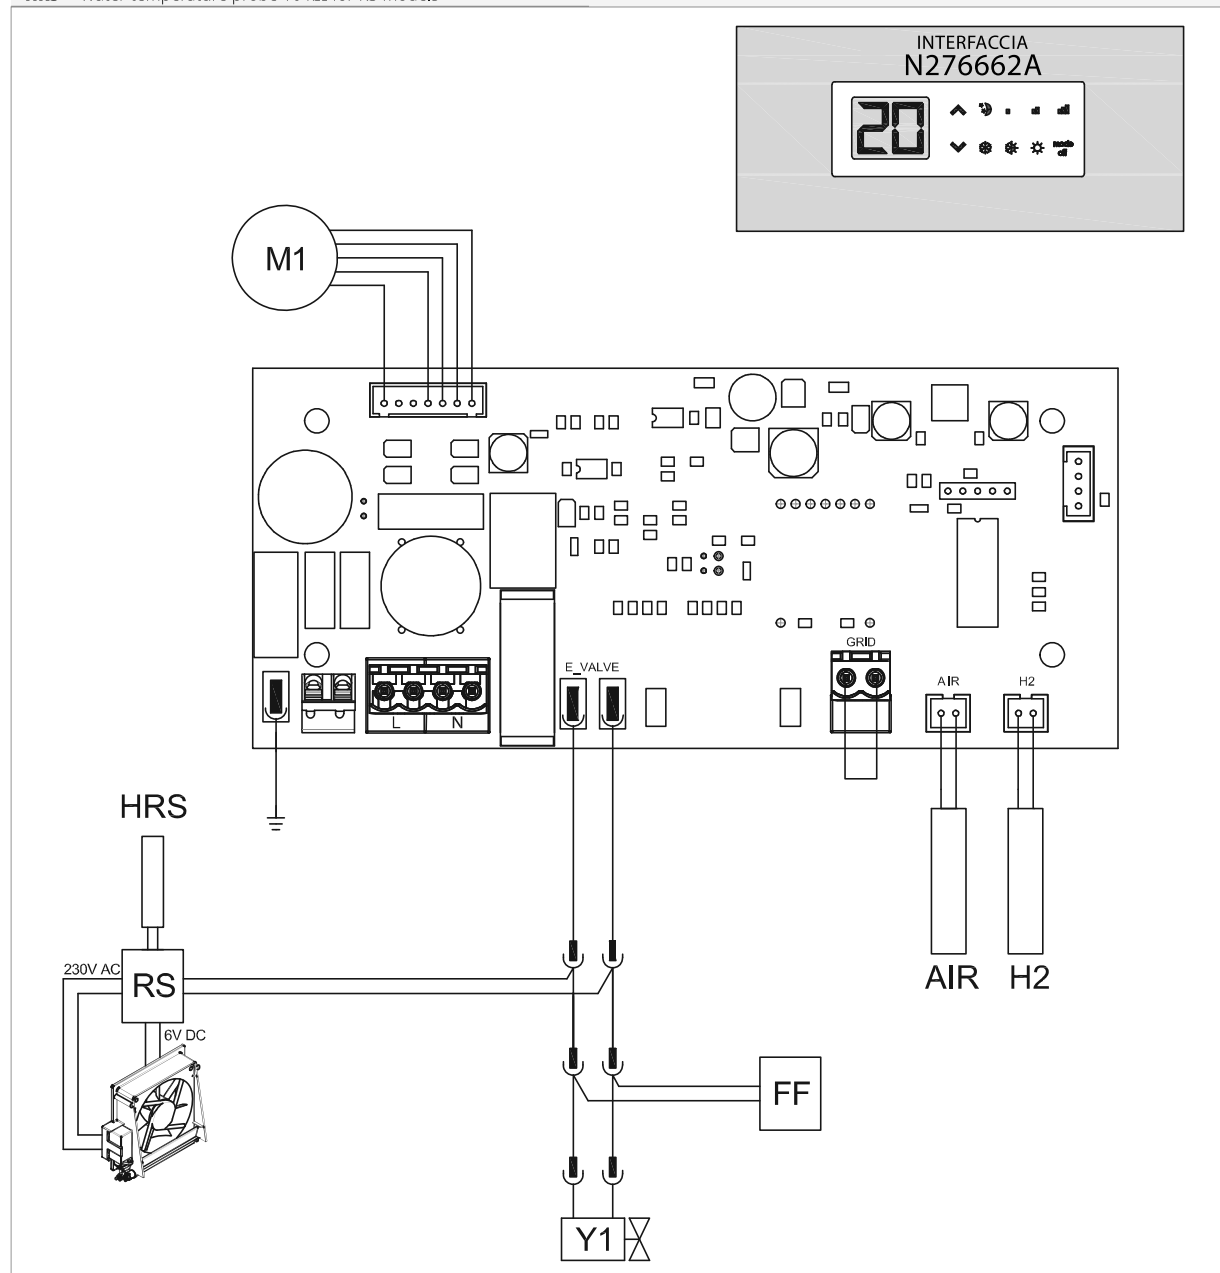

⚠ For models with hydraulic connections on the right hand side, please refer to "Models with right-hand hydraulic connections" [p. 15](#) to make the connections.

⚠ For radiant panel (RS) versions, please refer to the "Version configurations" [p. 15](#) section to make the connections.