



The Truth about Power Consumption in PIC[®] MCUs with XLP Technology vs. TI's MSP430

Authors: Jason Tollefson
Microchip Technology Inc.

INTRODUCTION

This white paper will clarify the facts behind Texas Instrument's arguments that presented TI's MSP430 as a better low power device than Microchip's XLP technology.

In a white paper published online, Texas Instruments compared Microchip's PIC24F with extremely low power nanoWatt XLP technology with their own MSP430 with Ultra Low Power.

TI's white paper makes reference to eight individual parameters, important in extremely low power applications, where they argue that its own technology outperforms Microchip's XLP technology.

This white paper discusses each of TI's eight claims, identifies the flaws in TI's arguments and presents the facts.

CLAIM 1: ALL MSP430 MCUs ARE CONSISTENTLY LOW POWER

The facts here do not support the argument. There are several MSP430 MCUs, such as the MSP430F2252, that consume 100 nA while in Sleep. There are also devices such as the MSP430F553X family that consume 1700% more current in sleep at 1690 nA. These numbers are an order of magnitude different from each other, and are therefore not consistent.

[Table 1](#) illustrates the extreme differences within the MSP430 line.

TABLE 1: DIFFERENCE BETWEEN THE DEVICES

TI Device (3V Data)	Flash Memory & Pins	LPM5 - Off (nA)	LPM4 - Storage (nA)	LPM3 + WDT (nA)	LPM3 + RTC (Simple Timer)	Run Mode 8 MHz with DCO (mA)
MSP430F2001	2 KB 14 pins	—	100	500	900	2.0
MSP430F2252	8-32 KB 40 pins	—	100	600	900	2.8
MSP430F2619	92-120 KB 64-80 pins	—	200	600	1100	4.3
MSP430F553X	192-256 KB 80-100 pins	100	1690	1800	2600	1.1


CLAIM 2: OPERATION FROM A 1.8V POWER SOURCE IS NOT RELEVANT IN EXTREMELY LOW POWER APPLICATIONS

This is an erroneous claim since it simply dismisses a serious design consideration: the operation of the MCU as the supply voltage is reduced due to battery voltage degradation.

For the majority of the embedded electronics industry, the trend towards extremely low power technology is based on the use of batteries as the prime power source. Extremely low power technology, therefore, is synonymous with battery power and, in today's applications, this typically translates to single or dual cell supplies comprising of either a coin cell battery such as the CR2032, or a pair of Alkaline AA/AAA batteries. In both cases, the usable voltage range falls below 3.0V. In the case of a 1.5V alkaline-based battery, the voltage remains usable down to 0.9V, or 1.8V for a system using two batteries. For the popular CR2032, its usable voltage range drops to 2.5V before the voltage begins to reduce significantly, as shown in Figure 1.

TI claims that the MSP430 is designed specifically for battery powered applications. Their choice to not acknowledge that those applications must realistically continue to operate once the battery level has dropped below nominal, infers that the applications the MSP430 are best suited to are not battery powered applications.

FIGURE 1: BATTERY DISCHARGE CURVES

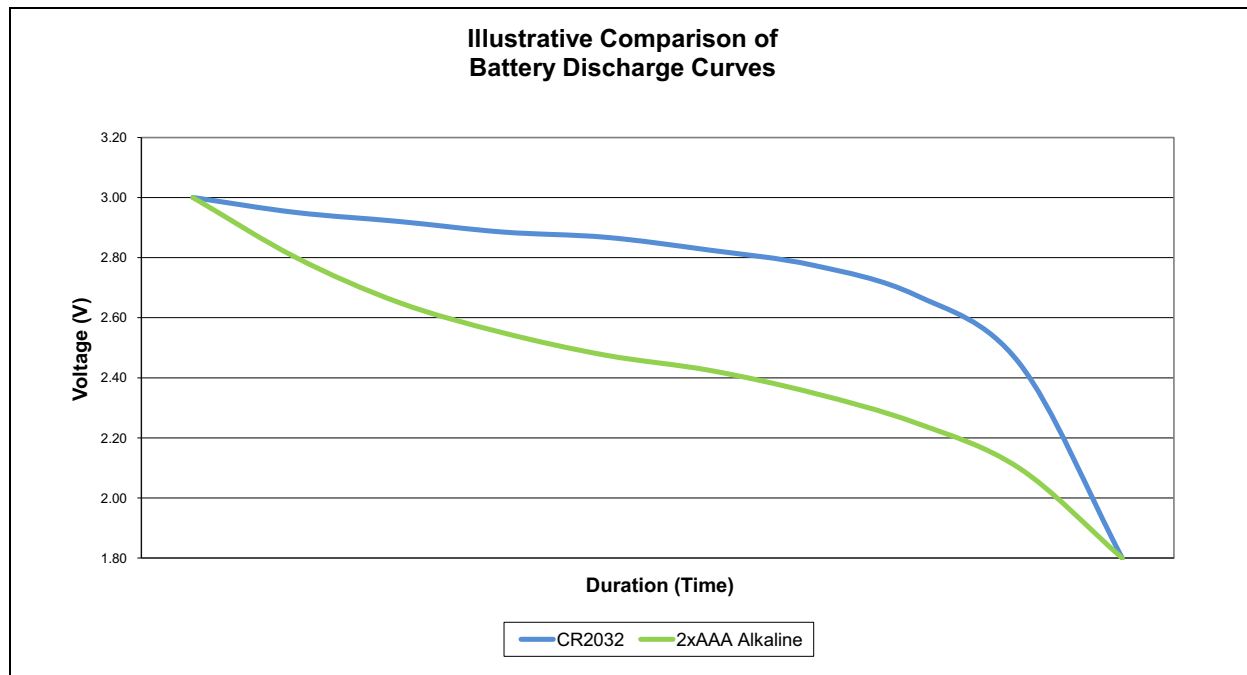

CLAIM 3: MSP IS THE WORLD'S LOWEST POWER MICROCONTROLLER

TI's white paper claims that the MSP430 demonstrates lower power consumption in all modes of operation. However, TI can only support this claim by asserting that the Deep Sleep mode of the PIC24F with XLP technology is both 'dangerous' and 'inconvenient', and thereby discounts it.

In truth, the MSP430s do not include a Deep Sleep mode, and it isn't possible to remove power to the RAM and recover (see [Claim 5: Deep Sleep Mode is Dangerous](#)). RAM leakage is a major drain on the battery during extended periods of inactivity; because of this, TI attempts to discredit Deep Sleep by stating it is dangerous or inconvenient. Neither view is defensible. In real-world scenarios, where an application is expected to operate reliably for many years on a single battery, there can be no such operating mode as 'inconvenient'.

Furthermore, the TI white paper claims that Deep Sleep mode is more like an 'off' mode because it can only be instantiated by turning off most other active elements of the PIC24F. However, as [Table 2](#) illustrates, Deep Sleep mode can be instantiated with almost any combination of Brown-out Reset (BOR), Watchdog Timer (WDT) and Real Time Clock/Calendar (RTCC) active, while still achieving lower current consumption than the MSP430 in any of its power saving modes.

Promoting any device as the world's lowest power microcontroller must always carry exclusions, but excluding a competitor's most efficient power saving mode simply because your device cannot support it seems disingenuous.

CLAIM 4: ALL SLEEP MODES ARE THE SAME

The exclusion of Deep Sleep mode is present throughout TI's white paper, presumably because the MSP430 isn't able to offer a comparative extreme energy saving mode. In our opinion, not supporting a feature doesn't make it acceptable to ignore it, yet TI repeatedly refuses to acknowledge the PIC24F with XLP technology's most advantageous features.

Instead, TI chooses to obscure the differences between the PIC24F's Sleep mode and Deep Sleep mode, preferring to label Deep Sleep mode as a 'storage mode' and refusing to recognize its flexibility.

This is most obviously demonstrated in the comparison of the MSP430's LPM4 (Low Power Mode 4) – described by TI as an 'equivalent storage mode' – with power consumption figures obtained for the PIC24F in Sleep mode. Ironically, the PIC® microcontroller's performance in Sleep mode is almost equivalent to the MSP430 in 'storage mode', and if the PIC24F's Deep Sleep mode figures are used – as they should have been by TI – the results are even more favorable for Microchip.

The end result is that the PIC24F demonstrates lower power in Deep Sleep mode than any mode the MSP430 can offer, without sacrificing BOR, WDT or RTCC.

TABLE 2: CURRENT CONSUMPTION FOR DIFFERENT SLEEP MODES

MCU Family (3V Data)	Flash Memory and Pins	Lowest Sleep Current	Lowest Sleep with BOR	Lowest Sleep with WDT	Lowest Sleep with RTCC
MSP430F2001	2 KB 14 Pins	100	100	500	900
MSP430F2252	8-32 KB 40 Pins	100	100	600	900
PIC24F16KA102	4-16 KB 14-28 Pins	28	36	476	676

CLAIM 5: DEEP SLEEP MODE IS DANGEROUS

Deep Sleep mode is characterized in TI's white paper as 'dangerous', and asserts that it is a storage mode because a sleep mode requires the ability to wake up, which is something that, according to the engineers at Texas Instruments, the PIC24F's Deep Sleep mode does not offer.

This is simply wrong. The PIC24F has six methods of waking from Deep Sleep. In fact, it has two dedicated, autonomous, wake-up options:

- Deep Sleep WDT
- Real-Time Clock/Calendar.

An external interrupt or a Master Reset, POR, or BOR can also be used as wake-up options.

It is possible that TI is equating the PIC24F's Deep Sleep mode to the MSP430's LPM5; which, by its own admission, is a virtual off mode. When entering LPM5, power is removed from the processor's core, removing all data from the registers, SRAM, and, most significantly, the I/O pin state. Exiting from LPM5 is only possible from an external event and causes a system-wide reset. It is clear that using such restrictive measures like LPM5 to conserve power must be used wisely and only in situations where a total system reset is possible from external sources; otherwise, it might be considered dangerous.

CLAIM 6: MSP430 WINS BATTERY-LIFE CASE STUDIES


In this claim, a use case is presented to illustrate run time from a battery. For the examples cited in the white paper, TI uses 'typical' data sheet figures for its own device, but maximum (data sheet) figures for the PIC microcontroller. There is no explanation given in the paper as to why this was done, or why it would be a proper comparison.

The examples given in TI's white paper cover two scenarios: an application with a 1% duty cycle, and an application with a 0.1% duty cycle. In each example, TI uses absolute maximum data sheet figures when calculating battery lifetime for the PIC24F, but typical data sheet figures when calculating the battery lifetime for the MSP430.

In addition to the mis-use of specification data, the comparison is made without using the PIC MCU's lowest power mode, Deep Sleep. Clearly for a use-case to be described as typical, it must use 'typical' figures throughout the comparison. Furthermore, it should include all possible features of the microcontroller.

When Microchip's engineers reconstructed this experiment using TI's own data for its part, but the correct data for the PIC24F – including the use of Deep Sleep Mode – the results were significantly different (refer to [Figure 2](#)). First, for the application example with a 1% duty cycle, instead of achieving a lifetime of less than 2 years, the PIC24F remains operable for 6.7 years, which is 4 months longer than the best figures returned by the MSP430 parts. Second, for the application example with a duty cycle of 0.1%, the PIC24F achieves almost 30 years of operational time, which is nearly 5 years longer than the best reported MSP430 figure. It should be noted that a 30 year lifetime is theoretical as it would be much longer than the shelf life of typical CR2032 coin cells.

FIGURE 2: BATTERY LIFE IN MICROCONTROLLER APPLICATIONS

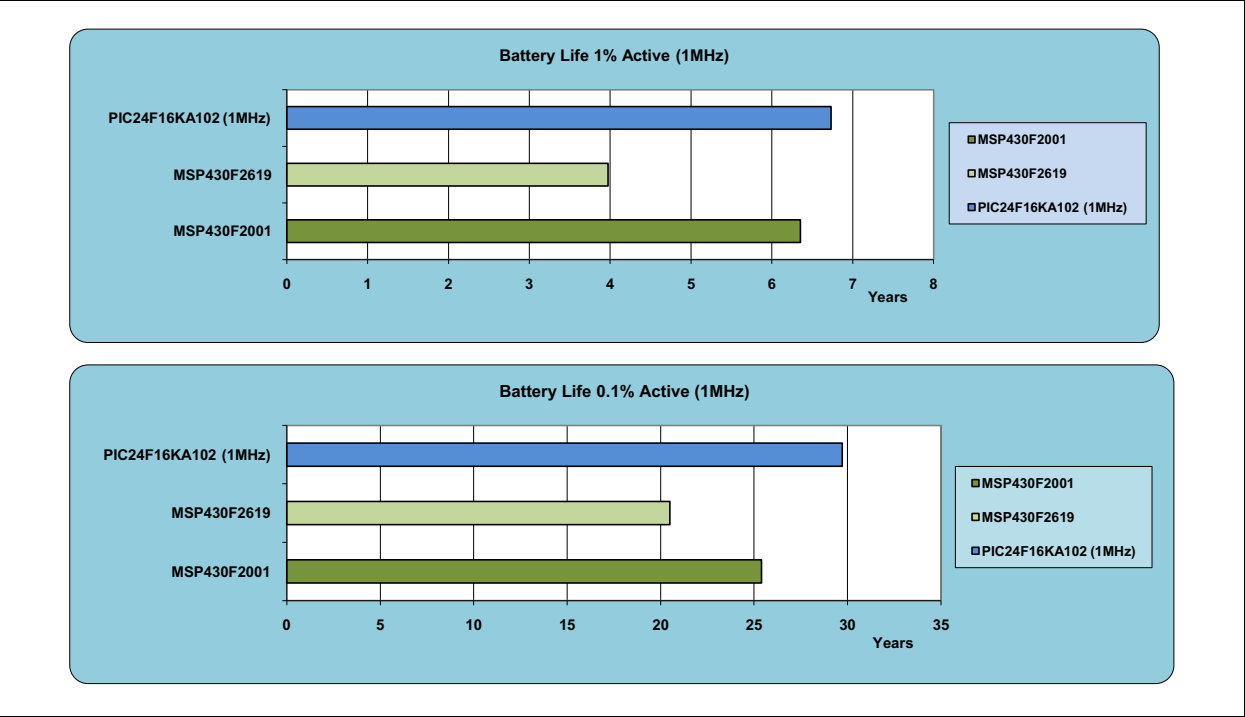


CLAIM 7: MSP430 HAS FASTER WAKE-UP TIMES

This claim is valid, insomuch as the MSP430's digitally controlled oscillator can start up and reach a stable 16 MHz clock signal in 1 μ S, while the PIC24F's RC oscillator circuit takes around 2 μ S longer to start-up.

However, the MPS430 is only capable of running at 16 MHz with a supply voltage in excess of 3.0V; below this voltage, the part is inhibited from running at 16 MHz (refer to Figure 3). The claim, therefore, is largely academic in battery powered applications, where the nominal voltage would start at 3.0V and degrade from there. Incidentally, the PIC24F is capable of running at 32 MHz at 3.0V.

FIGURE 3: MICROCONTROLLER OPERATION FREQUENCY VS. VOLTAGE

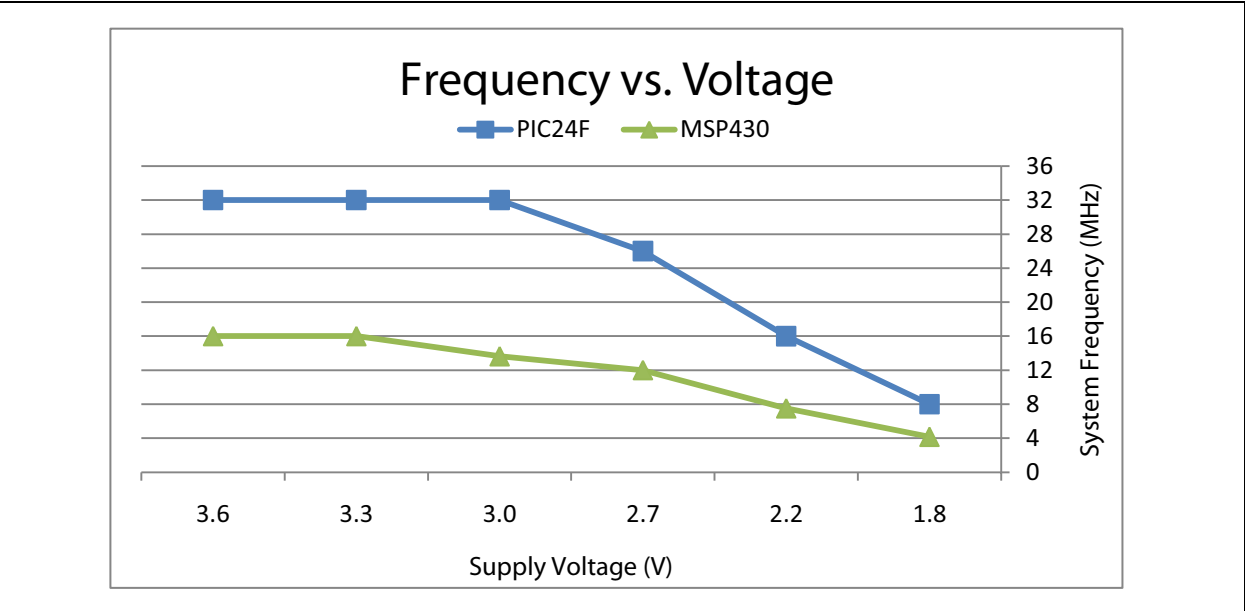

CLAIM 8: MSP430 IS 2X FASTER IN EXECUTION

The last claim to refute is related to Claim 7, which proposes that waking faster and executing code quicker results in less energy consumed. Calculating the energy usage shows a different conclusion. The majority of the MSP430's instructions require two or more cycles, while around 90% of the PIC24F's instructions are single cycle. This means that for a given operation, the PIC24F architecture requires fewer instruction cycles than the MSP430. Fewer instruction cycles mean less bus activity and fewer gate transitions, the main cause of active power consumption in a CMOS device.

The example in [Table 3](#) lists the results of a simple but often executed task: copying a 32 byte array from one part of memory to another. It can be seen that, indeed, the MSP430 starts executing code 1 μ S after initialization, but it continues to execute code long after the PIC24F has completed the task, expending significantly more energy – almost three times as much – to achieve the same result. This is due to the PIC microcontroller's instruction set offering more single cycle instructions and being more efficient in their application.

TABLE 3: METRIC COMPARISONS

Metric	PIC24F16KA102	MSP430F2619
Clock Startup	3 μ S	1 μ S
Instruction Cycles	40	316
Execution Time (@ 4 MHz)	32 μ S @ 2 MIPS	80 μ S @ 4 MIPS
I _{DD}	1.6 mA	1.5 mA
Energy Consumption I _{DD} * Execution Time @ 3V	158 μ J	363 μ J

CONCLUSION

The conclusion put forward by TI in its white paper is that the MSP430 is the world's lowest power microcontroller family, a claim that has proven to be false in the examples analyzed in this paper.

The reality is that the PIC24F has been designed for extremely low power operation in power-constrained applications.

All of the evidence points to the PIC24F family being far superior in every way, from features to function. Not only is it able to make the best use of all the available power from a battery source, it does so in the most flexible and efficient way.

When designing a power-constrained application, the design team doesn't want to compound that challenge by being constrained by the features of the microcontroller. It needs a solution that is simply better at extremely low power operation, whatever the application. The PIC24F family meets that need and does it without imposing restrictions on the power supply, sleep modes or code efficiency.

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC³² logo, rfPIC and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscent Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICkit, PICTail, REAL ICE, rLAB, Select Mode, Total Endurance, TSHARC, UniWinDriver, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2010, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

ISBN: 978-1-60932-538-1

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949:2002 ==

Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://support.microchip.com>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Farmington Hills, MI
Tel: 248-538-2250
Fax: 248-538-2260

Kokomo
Kokomo, IN
Tel: 765-864-8360
Fax: 765-864-8387

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

Santa Clara
Santa Clara, CA
Tel: 408-961-6444
Fax: 408-961-6445

Toronto
Mississauga, Ontario,
Canada
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon
Hong Kong
Tel: 852-2401-1200
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8528-2100
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Hong Kong SAR
Tel: 852-2401-1200
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8203-2660
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-2566-1512
Fax: 91-20-2566-1513

Japan - Yokohama
Tel: 81-45-471- 6166
Fax: 81-45-471-6122

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-6578-300
Fax: 886-3-6578-370

Taiwan - Kaohsiung
Tel: 886-7-213-7830
Fax: 886-7-330-9305

Taiwan - Taipei
Tel: 886-2-2500-6610
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

UK - Wokingham
Tel: 44-118-921-5869
Fax: 44-118-921-5820