



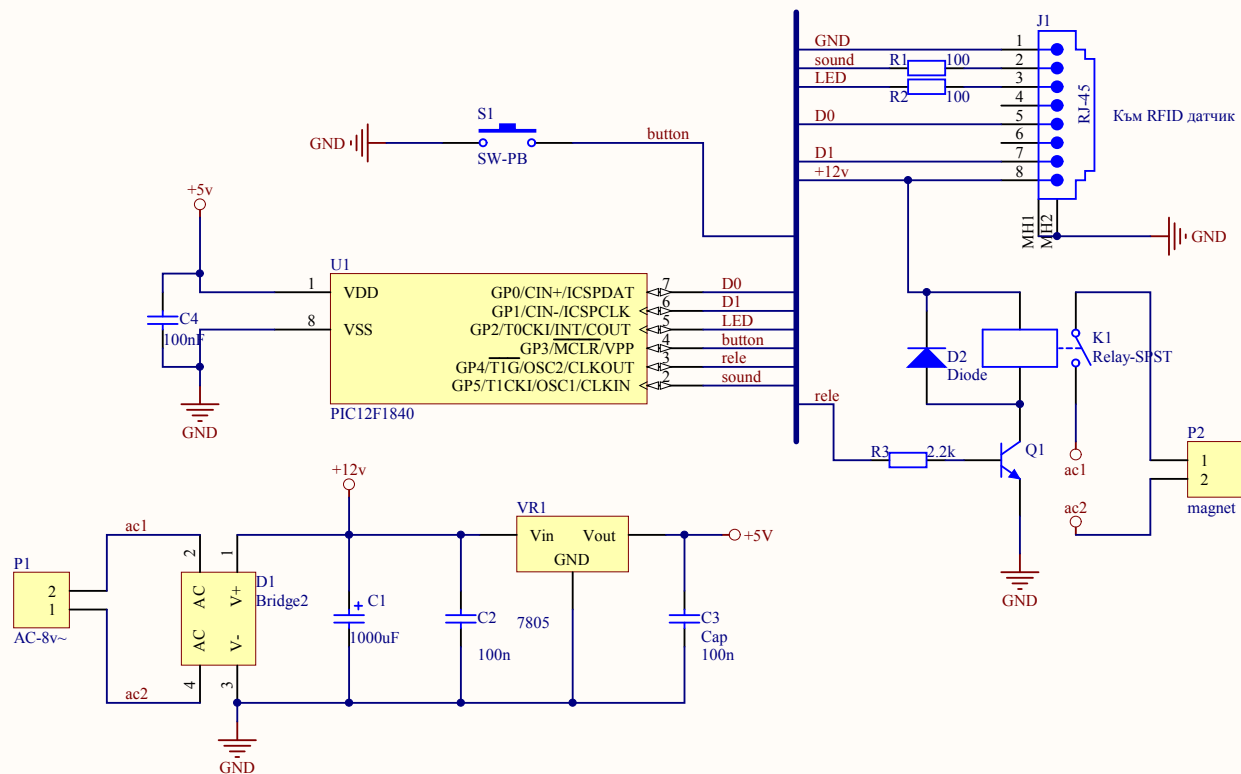

Title		
Size	Number	Revision
A4		
Date:	23.9.2015 г.	Sheet of
File:	D:\VLADO\..rfid.SchDoc	Drawn By:

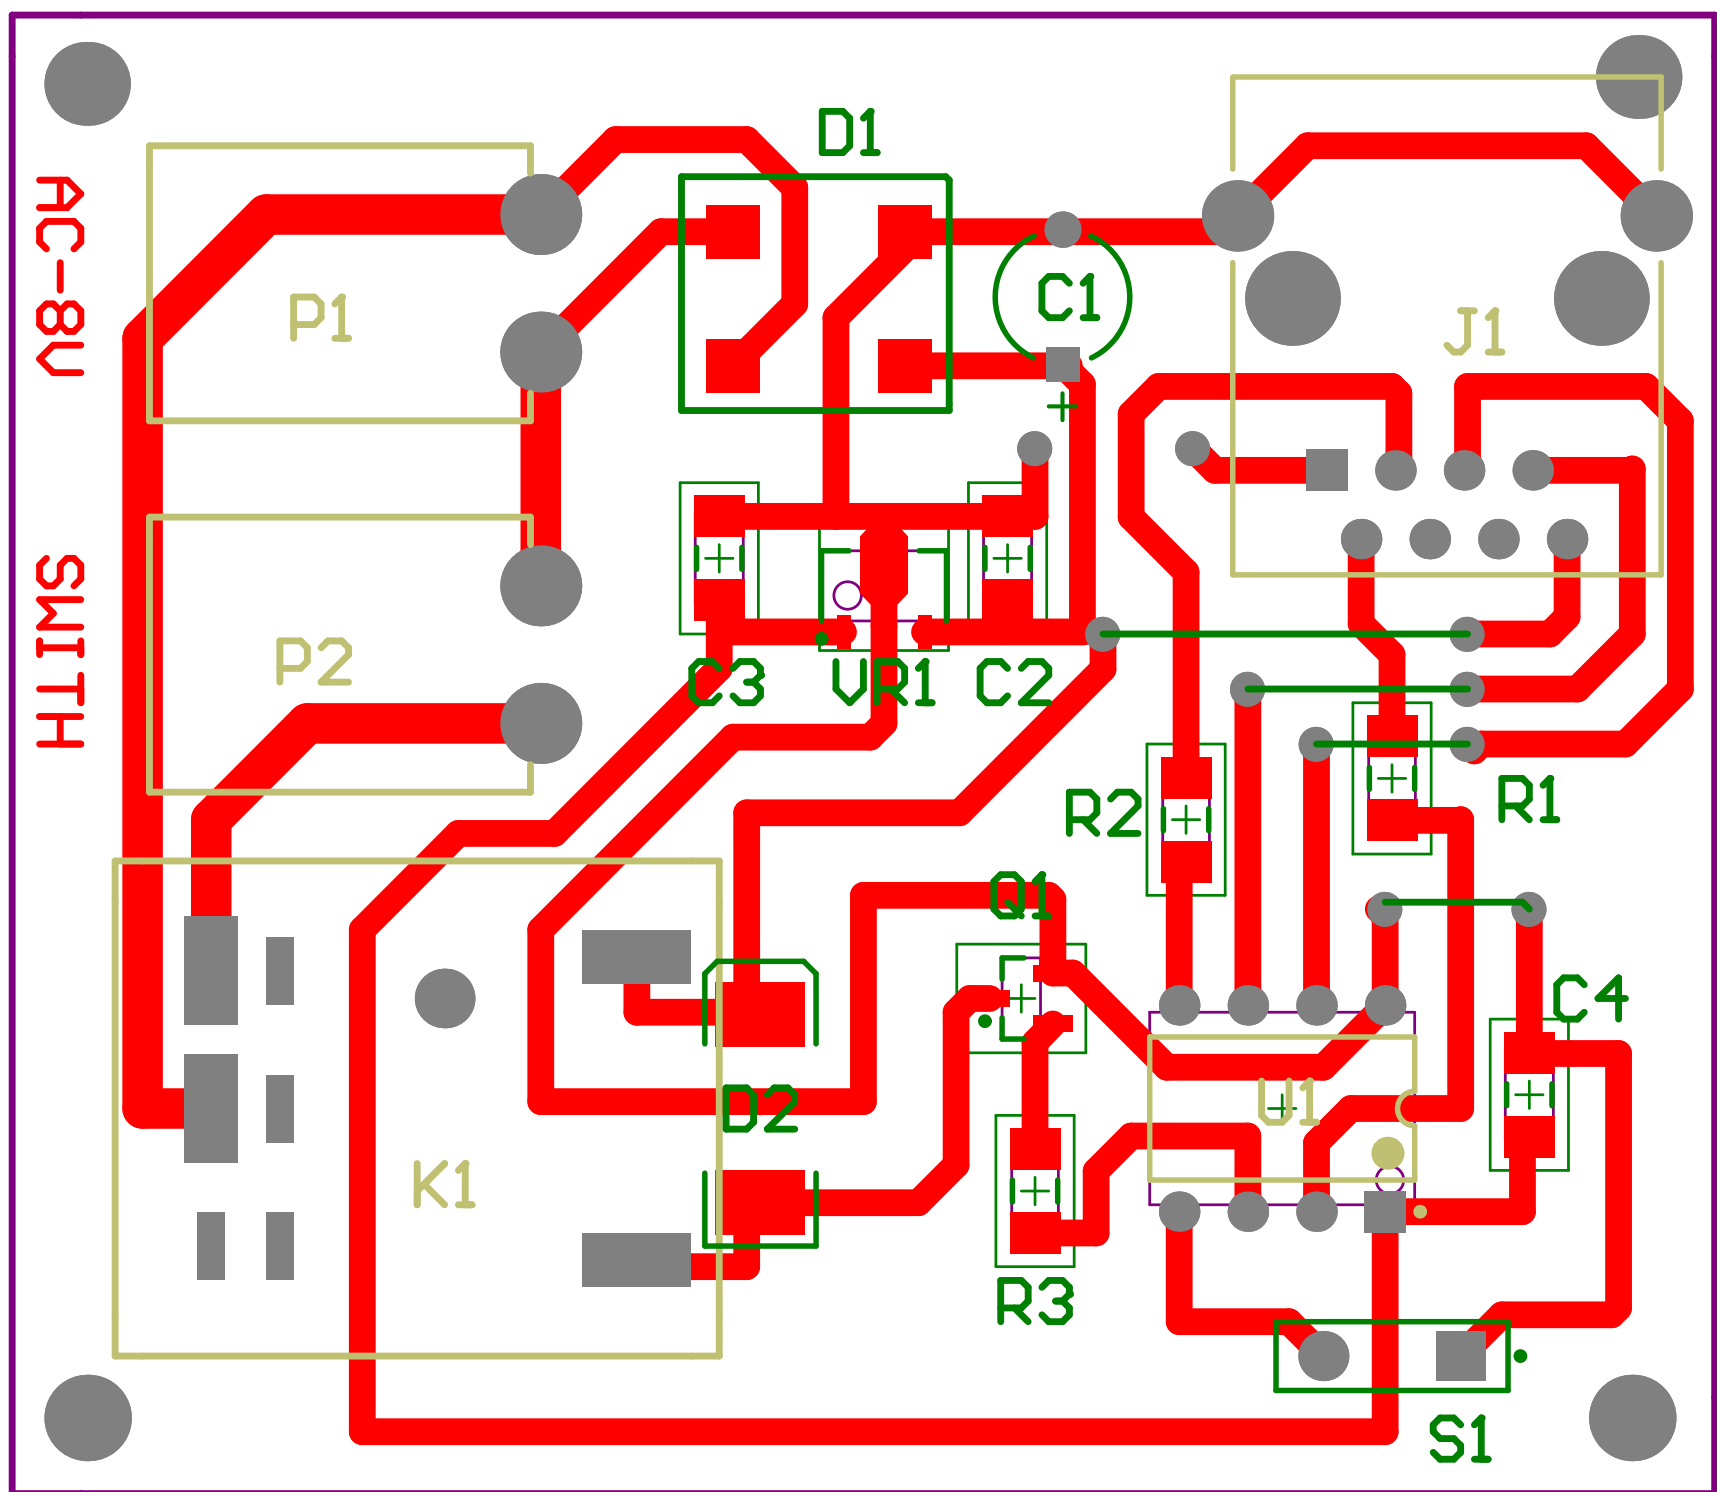

Bill of Materials

<Parameter Title not found>

Source Data From: rfid.PrjCor

Project: rfid.PrjCor

Variant: None

Creation Date: 23.9.2015 r. 16:03:48

Print Date: 42270 42270,66946

Footprint	Comment	LibRef	Designator	Description	Quantity
CAPPR2-5x6.8	Cap Pol2	Cap Pol2	C1	Polarized Capacitor (Axial)	1
CAPC2512M	Cap	Cap	C2	Capacitor	1
CAPC3216M	Cap	Cap	C3, C4	Capacitor	2
grec1	Bridge2	Bridge2	D1	Diode Bridge	1
DSO-C2/X3.3	Diode	Diode	D2	Default Diode	1
43202-8927	RJ-45	43202-8927	J1	Right Angle, Ultra Low Profile PCB Jack, with all Panel Grounding Tabs, Shielded Version	1
rele3	Relay-SPST	Relay-SPST	K1	Single-Pole Single-Throw Relay	1
buxa2	AC-8v~	Header 2	P1	Header, 2-Pin	1
buxa2	magnet	Header 2	P2	Header, 2-Pin	1
SOT95P230-3M	NPN	NPN	Q1	NPN Bipolar Transistor	1
RESC3216M	Res2	Res2	R1, R2, R3	Resistor	3
SPST-2	SW-PB	SW-PB	S1	Switch	1
PDIP300-P8	PIC12F1840	PIC12F629-I/P	U1	FLASH-Based 8-Bit CMOS Microcontroller, 8-Pin PDIP, Industrial Temperature	1
SOT89L	7805	Volt Reg	VR1	Voltage Regulator	1
					17

Approved	Notes

--