
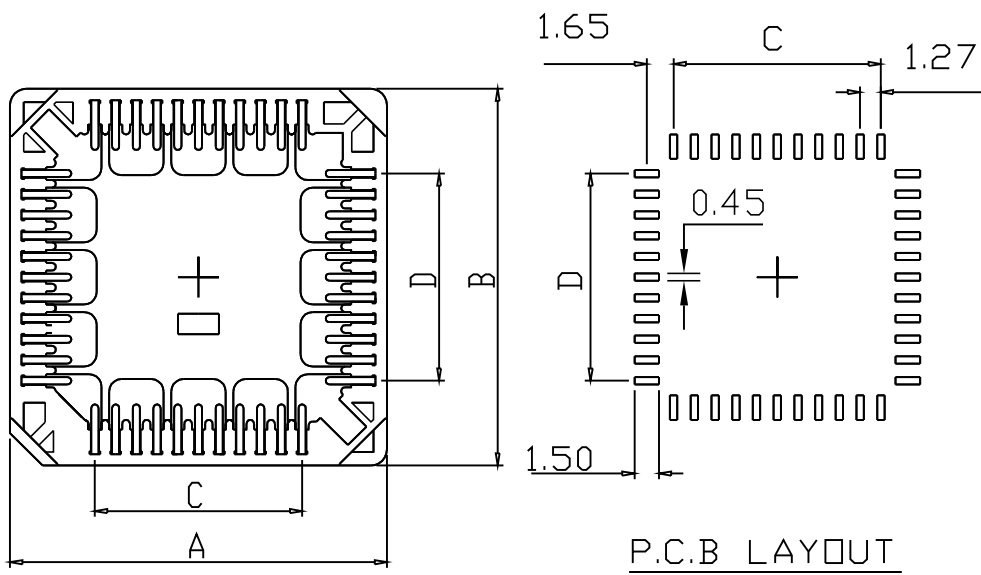
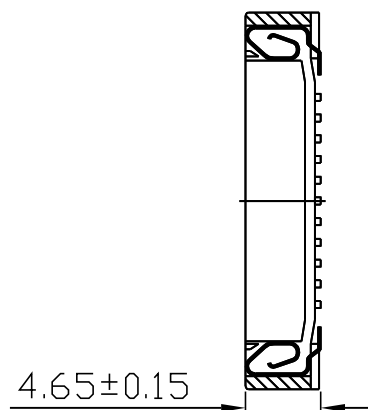


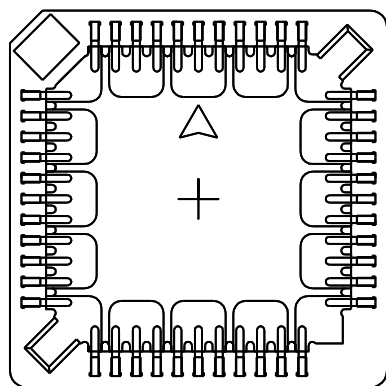

P.C.B LAYOUT

MATERIAL:

- *Contact material: Phosphor bronze JIS 5210
- *Contact plating: 150 μ tin over 40 μ nickel
- *Insulator: Hi-temp pps, UL 94V-0, 240°C

SPECIFICATIONS:

- *Temperature range: -50°C to 105°C
- *Current rating: 1 AMP
- *Capacitance: 1.0 PicoFarads (Max)
- *Contact resistance: 30 Milliohms (Max)
- *Insulation resistance: 1000 Megohm (Max)
- *Withstanding voltage: AC 600 Vrms

NO. OF CONTACTS \	A	B	C	D
20	15.68	15.68	5.08	5.08
28	18.22	18.22	7.62	7.62
32	18.22	20.76	7.62	10.16
44	23.3	23.3	12.70	12.70
52	25.84	25.84	15.24	15.24
68	30.92	30.92	20.32	20.32
84	36.00	36.00	25.40	25.40

		CUSTOMER:
TITLE: PLCC SOCKET SMT TYPE		DATE:
DWG NO:	SCALE: 2/1	UNIT: mm
FILE NO:	SHEET NO: 1-1	MATERIAL: PPS+G40%(V0)