

Cassette Car Radio 22 DC 396/75

Service
Service
Service

ERSATZTEILE
für Philips Car Systems
erhalten Sie bei:


KiVi Service GmbH
Windmühlenstr. 41 · 31178 Giesen/Emmerke
Tel.: 051 21 / 6 00 20 · Fax 051 21 / 60 02 54



For repair instructions of the cassette deck see Service Manual LCA *2-4 (4822 725 23523)

Service Manual

12 V 

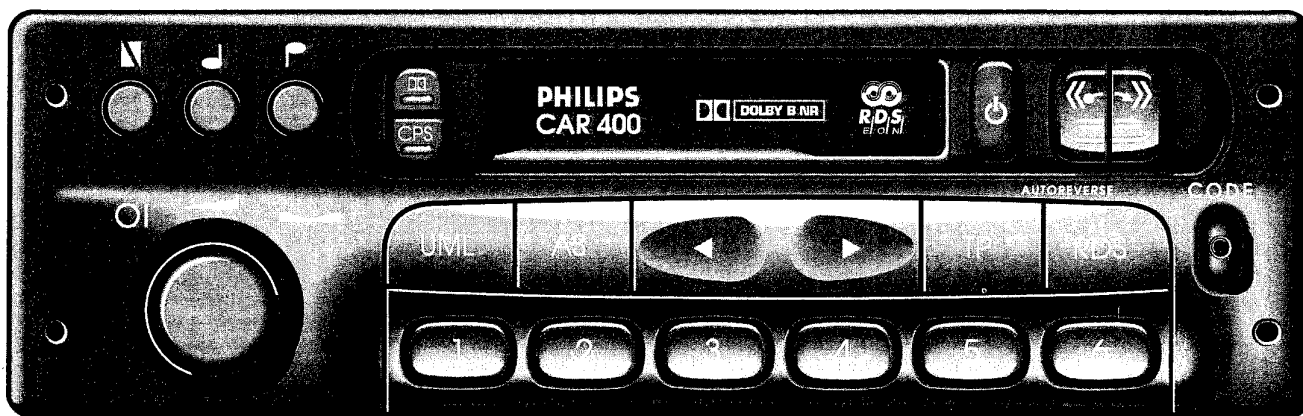


Published by Philips Car Sytems Printed in the Netherlands © Copyright reserved Subject to modification 4822 725 23522

PCS 80 472



PHILIPS

2803

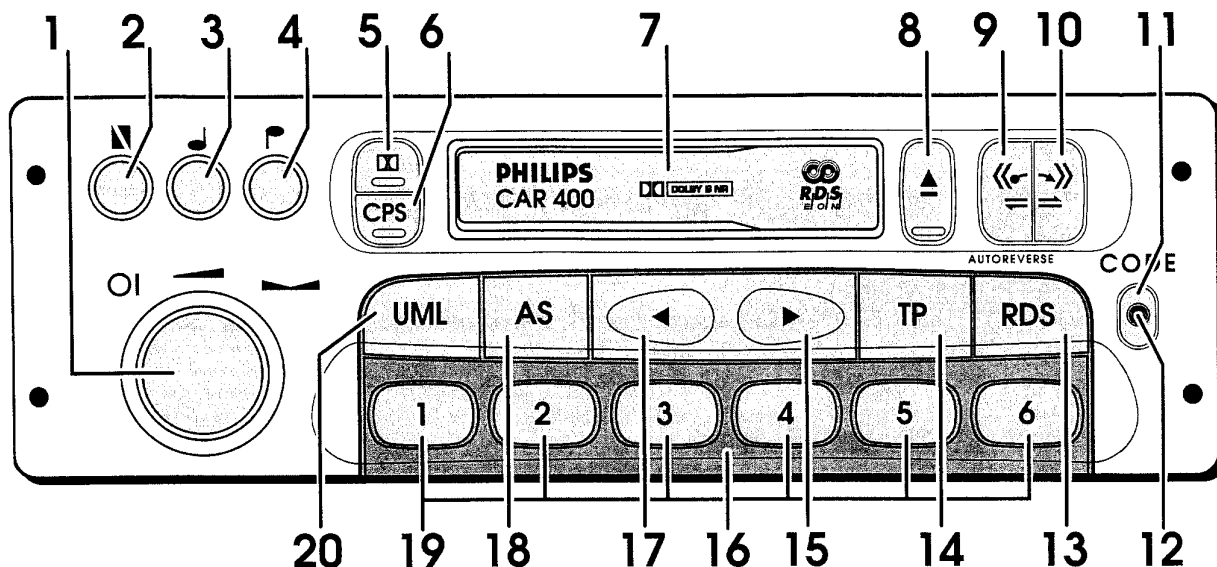

RADIO CONTROLS

1. On/Off, Volume, Balance

push: on/off (see also on/off-automatic)
 turn: adjust volume
 pull-turn: adjust balance

2. Fader

push: sink and release the button
 turn: adjust fader

3. Bass

push: sink and release the button
 turn: adjust bass

4. Treble

push: sink and release the button
 turn: adjust treble

5. Dolby

push: switch DOLBY B on/off

6. CPS (CASSETTE PROGRAM SEARCH)

push: MSS on/off

7. Cassette flap

8. Cassette standby

push: switch between cassette and radio mode

9. FRW

push down: – while normal cass. mode: fast rewind (radio during wind)
 – while CPS-mode: wind back to the beginning of actual track (no radio during wind)
 – together with FFW button: eject cassette
 push half: – while fast forward wind: stop fast forward and playback from the current tape position
 – together with FFW button: change play direction

10. FFW

push down: – while normal cass. mode: fast forward wind (radio during wind)
 – while CPS-mode: wind to the beginning of next track (no radio during wind)
 – together with FRW button: eject cassette
 push half: – while fast rewind: stop fast rewind and playback from the current tape position
 – together with FRW button: change play direction

11. Release button

push: – release control panel, set will switch off

12. Blink LED – blinking when set off and code activ

13. RDS

push: RDS on/off, default=RDS on: programme name will be displayed instead of frequency.

hold: updates FM learn memory

14. TP (see also TA-, PHONE-volume)

push: TP on (TP), start TP (FM-RDS) search if no TP station selected, interrupt cass. during TA

push: – while TP on: TP off ()

push-push: – while cass.mode + TA: TP off and switch back to cass. mode

15. Search up (see also TA-, SD-, PHONE-volume)

push: – while RDS off: search next receivable station (LOC level)

– while RDS+TP off: manual search up

– while RDS on: scroll stations off learn memory up

16. Detachable control panel

set switches off when released

17. Search down (see also TA-, SD-, PHONE-volume)

push: – while RDS off: search next receivable station (DX level)

– while RDS+TP off: manual search down

– while RDS on: scroll stations off learn memory down

18. AS (see also CODE)

push: switches band from U to U-AS e.g. M to M-AS

hold: search for best stations and store them under presets U-AS e.g. M-AS

19. Presets 1...6

push: select stored stations of the preselected band

hold (2 s): store actual station

hold (5 s): switch REG ON/REG OFF for the concerned station, status will be briefly displayed
REG OFF is default, REG ON is briefly displayed after switch on

20. UML (see also SD-Volume)

push: scroll wavebands – U – M – L – U ...

– while cass. mode: station name e.g. frequency of actual station is displayed
for ~5 sec.

STEERING WHEEL CONTROLS (SWC)

The SWC works in parallel to the radio controls.

They are recognized by the set (pin A2 of connectorblock) by different voltages.

+	volume up	1,28 V +/- 0,1 V
-	volume down	0,73 V +/- 0,1 V
0	source selection (radio – cassette)	1,85 V +/- 0,1 V
>	search up	2,43 V +/- 0,1 V
<	search down	3,05 V +/- 0,1 V
->	scroll presets of selected band	3,66 V +/- 0,1 V

ADDITIONAL FEATURES

1. On/Off Automatic

Automatic switch on

When the set is switched on it can be switched off and on with the ignition key (default)

This feature can be switched off as follows:

- ignition on, set off
 - switch set on while holding 'PRESET 1' and 'PRESET 3' until bleep
- Now the set can only be switched on and off with the the on/off button.

Proceed the same way to activate automatic switch on again.

Just before the confirmation bleeps the status IGNI ON or IGNI OFF is briefly displayed

Automatic switch off

You can switch on the set by pushing the on/off button although when the ignition is off.

After one hour it will switch off automatic.

This feature does not depend on the chosen automatic switch on mode.

2. GALA – individual volume adjustment (optional)

You can set the speed dependent volume control in 5 different levels (car dependent):

- push 'UML' for about 3 sec. until bleep, display shows SD-VOL 2 (default value)
- push '<' or '>' to get the wanted volume level (SD-VOL 0 = GALA OFF)
- push 'UML' for about 3 sec. until bleep to store the setting

3. Telefon

If a telephone is connected to the radio, PHONE will be displayed every time the telefon is switched on.

Radio and cassette playback will be interrupted. The telefon audio signal can be reproduced via the

speakers. The telefon volume can be set in 7 different levels (LEVEL -3....LEVEL +3; +/- 7,5 dB):

- switch set on while holding the 'TP' button depressed until bleep, display shows PH-VOL 2 (default value)
- push '<' or '>' to get the wanted volume level
- push 'TP' for about 3 sec. until bleep to store the setting

Telefon has priority over traffic announcement (ta). In case of a ta during a call the name of the TP station name will be displayed instead of PHONE. By pushing the 'TP' button you make the ta audible. Push 'TP' again to switch back to telefon audio reproduction.

4. TA Volume

You can set the TA volume in 7 different levels:

- push 'TP' for about 3 sec. until bleep, display will show TP-VOL 0 (default value)
- push '<' or '>' to get the wanted volume level (LEVEL -3....LEVEL +3)
- push 'TP' for about 3 sec. until bleep to store the setting.

5. Display adaptation

The radio can be connected to a 8 or 10 digit display.

To toggle between the display modes switch set on while holding PRESET 4 and PRESET 6 depressed until bleep. Status will be displayed.

6. Impuls setting

Depending on the car three different kinds of GALA impulses are generated.

To adapt the set to the corresponding impulses switch set on while holding UML and PRESET 1, 2 or 3 depressed until bleep. Status will be displayed.

Setting 1: 7000 impulses/Km (194 Hz)

Setting 2: 16000 impulses/Km (444 Hz)

Setting 3: 25000 impulses/Km (695 Hz)

8. Power on events

Besides switch on by pushing volume knob or by ignition key the set switches on when:

- a cassette is inserted (only when no cassette was in before switch off)
- the telefon is switched on. After telefon off the set switches off again, except another power on event happens during the call.

MW tuning step setting

The MW search tuning grids can be adapted to the different bands (EUROPE - 9 KHz, US - 10 KHz):

- switch set on while holding PRESET 2 and PRESET 5 depressed until bleep. Status will be displayed.

SECURITY CODE HANDLING AND CONTROL PANEL MATCHING

Action

Displayed character

Activation and deactivation

Push 'AS' while switching set on

CODE (for 3 sec.) - - -

Push presets '1...4'

Digits of code number changes

Push 'AS' 3 sec. until bleep

Mode information

When the Code is activated display briefly shows CODE after every power on.

Code entering after power interruption

Switch power on

SAFE

Switch set off

Push 'AS' while switching set on

SAFE (for 3 sec.) - 10 - - -

(10 = number of allowed entry trials)

Push presets '1...4'

Digits of code number changes

Push 'AS' 3 sec. until bleep

Mode information

Wrong code

Enter wrong code number 1st

SAFE (10 sec. waiting time) - 9 - - -

Enter wrong code number 2nd

SAFE (10 sec. waiting time) - 8 - - -

Enter wrong code number 3rd

SAFE (10 min. waiting time) - 7 - - -

Enter wrong code number 4th

SAFE (20 min. waiting time) - 6 - - -

Enter wrong code number 5th

SAFE (40 min. waiting time) - 5 - - -

Enter wrong code number 6th

SAFE (80 min. waiting time) - 4 - - -

Enter wrong code number 7th

SAFE (160 min. waiting time) - 3 - - -

Enter wrong code number 8th

SAFE (320 min. waiting time) - 2 - - -

Enter wrong code number 9th

SAFE (640 min. waiting time) - 1 - - -

Enter wrong code number 10th

SAFE (Eeprom to be reloaded !)


If you have to apply a **new detachable control panel** to a set you have to proceed as described under **Code entering** after the set shows PANEL.

! NOTE


If you have any problems with activation of security code or others which belongs to the code, send the set to:

Philips Apparatefabrik Wetzlar
Department SP-CS
Philipsstrasse 1
D-35576 Wetzlar
GERMANY

CONNECTORBLOCK 22DC396

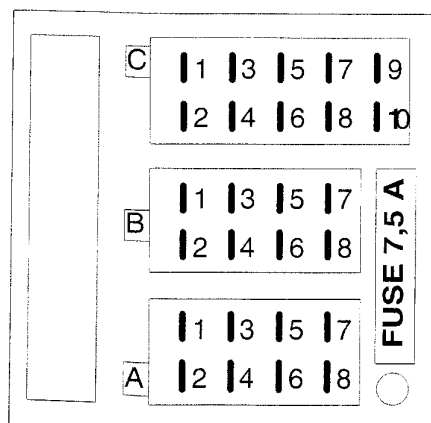

C1: SDADISPLAY	> 5	C6: DIAGNOSE	> 27
C2: SCL DISPLAY	> 26	C7: NC	
C3: TEL. AUDIO IN	> 14	C8: TEL. AUDIO GND	> 9
C4: MRQ DISPLAY	> 17	C9: NC	
C5: NC		C10: NC	
B1: RR+	> 13	B5: FL+	> 22
B2: RR-	> 25	B6: FL-	> 21
B3: FR+	> 23	B7: RL+	> 19
B4: FR-	> 24	B8: RL-	> 20
A1: GALA	> 16	A5: SWITCHED + (AERIAL)	> 4
A2: STEERING WHEEL CONTROL	> 15	A6: EXT. ILL.	> 2
A3: TEL. MUTE	> 28	A7: PERM. +	> 1
A4: IGN. KEY	> 3	A8: GND	> 18



22DC396/75

PARAMETER SETTINGS

With this function several parameters of the car radio can be set to the wishes of the customer.

To reach the parameter setting menu switch set on while holding 'RDS' depressed for 5 sec. until bleep:

Testmode A will be executed.

Push 'RDS' briefly to enter the first parameter P10 and all the next ones up to P55.

With 'PRESETS 1', 'PRESET 2' and 'PRESET 3' you can change the digits of the parameter values.

If no key is pushed within 10 sec. set will switch back to testmode A.

PAR- No.	Function	PAR- range	value range	default PAR	Grid	default value	EEPROM- location
Tuner adjustments							
P10	TP maximum time out / auto tuning time cycle	01-0F	10-150 sec	06	10 sec	60 sec	A0 45
RDS Parameter							
P16	TP synchronization break down time out cycle	01-0F	10-150 sec	0C	10 sec	120 sec	A0 4F
P17	TP-EON acceptance level for TA	35-C0	10-200 μ V	8A	* 1	36 dB μ V	A0 46
P18	FM memory, non RDS station acceptance level	35-C0	10-200 μ V	8A	* 1	36 dB μ V	A0 3F
P19	LV = Field strenght level	00-06		03	* 2		A0 42
P20	MP = Multipath reaction level	00-06		03	* 2		A0 44
P21	REL = Suppression counter release	40-C0		60	* 2		A0 41
P22	SUPP = Suppression counter	10-C0		96	* 2		A0 40
P23	NS = Noise reaction level	00-06		03	* 2		A0 43
P24	AF check agility static	11-30		1A	* 2		A0 4B
P25	AF check agility dynamic	02-05	0,2-0,5 sec	04	0,1 sec	0,4 sec	A0 4C
P26	Minimum duration between AF checks	02-14	0,2-2,0 sec	04	0,2 sec	0,8 sec	A0 4D
P27	AF minimum quality base	5A-80		74	* 2		A0 4E
Audio controls							
P31	TA bass level	003-300	-6dB - +6dB	003	2 dB	-6 dB	A0 53
P32	TA treble level	003-300	-6dB - +6dB	001	2 dB	-2 dB	A0 54
P33	TA fader level	000-600	-15dB - 0dB	500	2,5 dB	-2,5 dB	A0 52
P34	Telephone bass level	003-300	-6dB - +6dB	002	2 dB	-4 dB	A0 59
P35	Telephone treble level	003-300	-6dB - +6dB	001	2 dB	-2 dB	A0 5A
P36	Telephone fader level	000-600	-15dB - 0dB	500	2,5 dB	-2,5 dB	A0 58
P37	Power on volume level	00-1A	-80dB - 0dB	06	* 3	-37 dB	A0 5E
Speed dependent controls							
P41	SD-FRQ 1 (V1) / +2 dB BASS	00-FF	0-255 Km/h	46	1 Km/h	70 Km/h	A0 63
P42	SD-FRQ 2 (V2) / +2 dB BASS	00-FF	0-255 Km/h	78	1 Km/h	120 Km/h	A0 64
P43	SD-FRQ 3 (V3) / +2 dB BASS	00-FF	0-255 Km/h	28	1 Km/h	40 Km/h	A0 65
P44	SD-FRQ 4 (V4) / +2 dB BASS	00-FF	0-255 Km/h	5A	1 Km/h	90 Km/h	A0 66
P45	SD-FRQ 5 (V5) / +2 dB BASS	00-FF	0-255 Km/h	8C	1 Km/h	140 Km/h	A0 67
Illumination							
P51	Illumination logic A/B	00-01	A-B	01	on/off	Logic B	A0 68
P52	Illumination level X0	00-FF		30	* 4	940 mV	A0 69
P53	Illumination level Y0	00-FF		30	* 4	18 %	A0 6A
P54	Illumination level X1	00-FF		BE	* 4	3,742 V	A0 6B
P55	Illumination level Y1	00-FF		BE	* 4	74,5 %	A0 6C

*1 see table 'Representation of fieldstrenght'

*2 synthetic values for receiver subsystem

*3 see table 'volume levels'

*4 see figure 'illumination conversion curve'


REPRESENTATION OF FIELDSTRENGHT

Hex	μV	dB μV	Hex	μV	dB μV	Hex	μV	dB μV	Hex	μV	dB μV
F0	562	55	C0	200	46	8E	71	37	5E	25	28
EB	501	54	BA	178	45	8A	63	36	58	22	27
E7	447	53	B4	158	44	82	56	35	53	20	26
E4	398	52	AE	141	43	7E	50	34	4D	18	25
DB	355	51	AB	126	42	76	45	33	48	16	24
D5	316	50	A6	112	41	73	40	32	41	14	23
D2	282	49	A0	100	40	6D	35	31	3E	13	22
CC	251	48	9A	89	39	68	32	30	38	11	21
C6	224	47	95	79	38	63	28	29	35	10	20

VOLUME LEVELS

Hex	Level (dB)	Hex	Level (dB)	Hex	Level (dB)
00	- 80	09	- 29	12	- 15
01	- 70	0A	- 26	13	- 14
02	- 60	0B	- 24	14	- 13
03	- 51	0C	- 23	15	- 12
04	- 45	0D	- 21	16	- 11
05	- 41	0E	- 20	17	- 10
06	- 37	0F	- 19	18	- 7
07	- 34	10	- 17	19	- 4
08	- 31	11	- 16	1A	0

ILLUMINATION CONVERSION CURVE

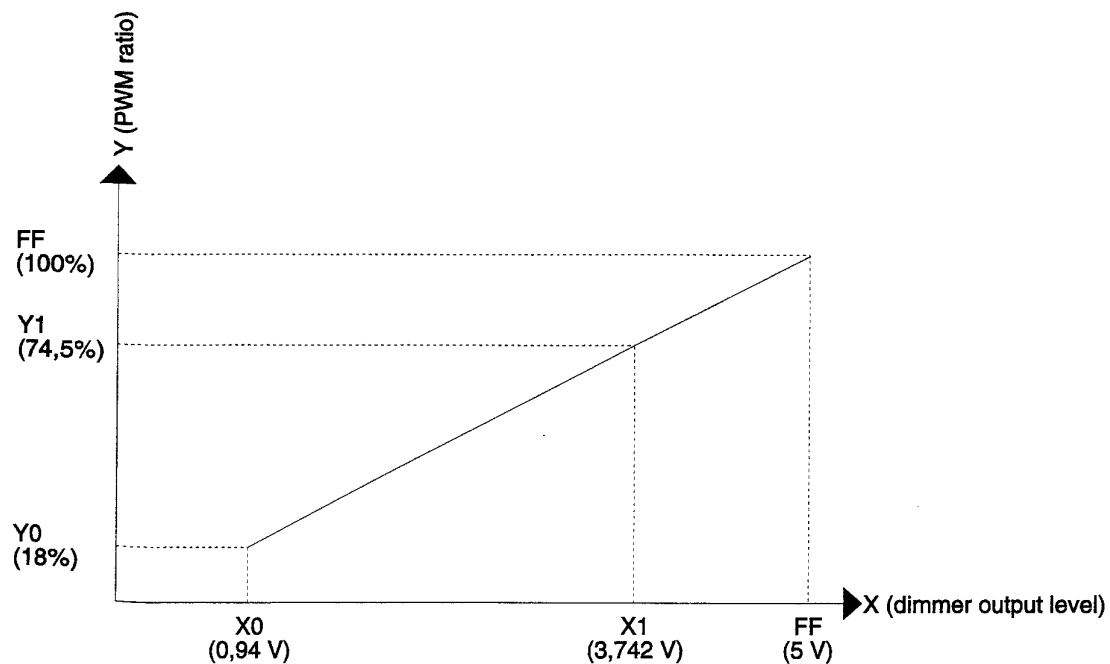

TESTMODE

Push 'RDS' for 5 sec. until second beep to activate testmode.

– Display shows hardware/software version of the set for 1 sec. (test mode IDENT):

8-digit display	HHHHSSSS	H = Hardware version
10-digit display	■■HHHHSSSS	S = Software version (0130 = Mask RC1)

Testmode A

8-digit display:	RQSXFFF.F	A = Fieldstrenght	0-F	(F=good)
		Q = Quality	0-F	(F=good)
	CPS □□ CR	S = Suppression counter	0-F	(F=good)
		X = Switching reasons	1-F	(see table next page)
		FFF.F = Frequency	MHZ	
10-digit display	VWRQSXFFF.F	CPS = RDS sync.state		on=locked
		□□ = PI code verification state		on=verified
	CPS □□ CR	Cr+blinking LED = AF change request		on=request
		V = Waveband		
		W = Preset number		

During test mode A all tuner features are accessible except RDS on/off.

– to leave testmode A push 'RDS' again for 5 sec. or switch set off.

– to reach testmode B push 'RDS' briefly, display shows PI code and frequency of the leader for 3 sec. (test mode PI):

8-digit display	PPPPFFF.F	P = PI Code
10-digit display	■■PPPPFFF.F	FFF.F = Frequency

Testmode B (if no key is pushed for 10 sec. set will switch back to testmode A)

Testmode LEADER (memorized values of the leader frequency)

8-digit display	■QAMNIRP	Q = Quality	0-F	(F=good)
		A = Fieldstrenght	0-F	(F=good)
	CPS	M = Multipath	0-F	(0=good)
		N = Noise	0-F	(0=good)
		I = Neighbor channel disturbance	0-3	(0=good)
10-digit display	■■■QAMNIRP	R = RDS sync.state	0-F	(F=good)
		P = PI confidence level	0-F	(F=good)
	CPS	CPS = AF connection attribute		on=AF in link list

– to get information about the alternative frequencies linked to the leader push ◀ or ▶.

Testmode AF FREQUENCY (memorized quality of AF frequency, displayed for about 3 sec.)

8-digit display	F■Q■FFF.F	F = Testmode AF FREQUENCY indication		
		Q = Quality	0-F	(F=good)
10-digit display	■■F■Q■FFF.F	FFF.F = Frequency	MHZ	

Testmode AF VALUATED (memorized values of alternative frequencies, displayed for about 5 sec.)


8-digit display	V■AMNIRP	V = Testmode AF VALUATED indication		
		A = Fieldstrenght	0-F	(F=good)
	CPS	M = Multipath	0-F	(0=good)
		N = Noise	0-F	(0=good)
		I = Neighbor channel disturbance	0-3	(0=good)
10-digit display	■■V■AMNIRP	R = RDS sync.state	0-F	(F=good)
		P = PI confidence level	0-F	(F=good)
	CPS	CPS = AF connection attribute		on=AF in link list

Testmode AF CURRENT (current values of alternative frequencies, displayed for about 5 sec.)

8-digit display	C■AMNIR■	C = Testmode AF CURRENT indication		
		A = Fieldstrenght	0-F	(F=good)
		M = Multipath	0-F	(0=good)
		N = Noise	0-F	(0=good)
		I = Neighbor channel distance	0-3	(0=good)
10-digit display	■■C■AMNIR■	R = RDS sync.state	0-F	(F=good)


During testmodes AF Frequency, AF valuated, AF Current a next or previous AF can be selected with ◀ or ▶

Switch set off to leave the testmode.

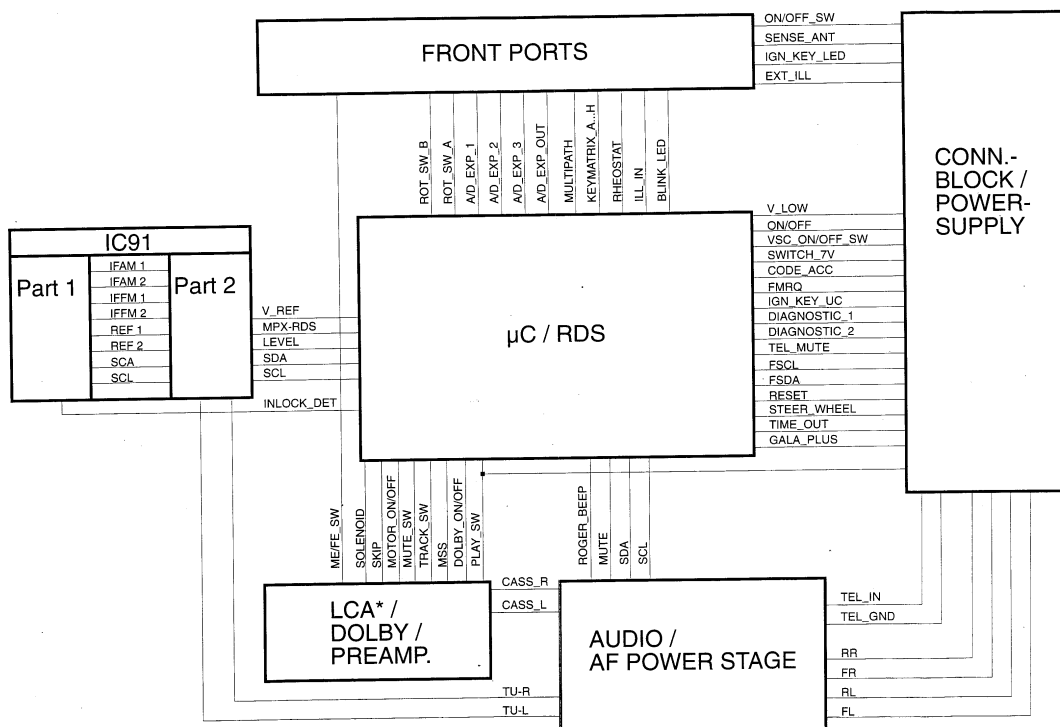


IC 91 Part I

Pos.7100 BF999
D: 7,7 V
G: 0,3 V
S: GND
Pos.7201 PMBFJ309
D: 4,1 V
G: 0 V
S: GND
Pos.7202 TEA6811
1: GND
2: 4,9 V
3: 4,9 V
4: 4,9 V (SDA)
5: 4,9 V (SCL)
6: 4,7 V
7: 4,6 V
8: GND
9: 4,9 V
10: GND
11: 8,4 V
12: 8,4 V
13: 8,4 V
14: GND
15: 8,3 V
16: 8,3 V
17: GND
18: 0 V / 2,8 V (AM)
19: 0 V / 2,8 V (AM)
20, 21: GND
22: 0 V / 2,8 V (AM)
23: GND
24: 0 V / 2,8 V (AM)
25: 0 V / 2,8 V (AM)
26: 0 V / 0,7 V (AM)
27: 0 V / 3,2 V (AM)
28: 0 V / 1,5 V (AM)
29: GND
30: 3,0 V
31: 3,0 V
32: 0 V
33: 4,3 V / 7,6 V (AM)
34: 4,0 V / 7,8 V (AM)
35: 2,6 V
36: GND
37: 6,0 V
38: 8,3 V
39, 40: Varicap voltage

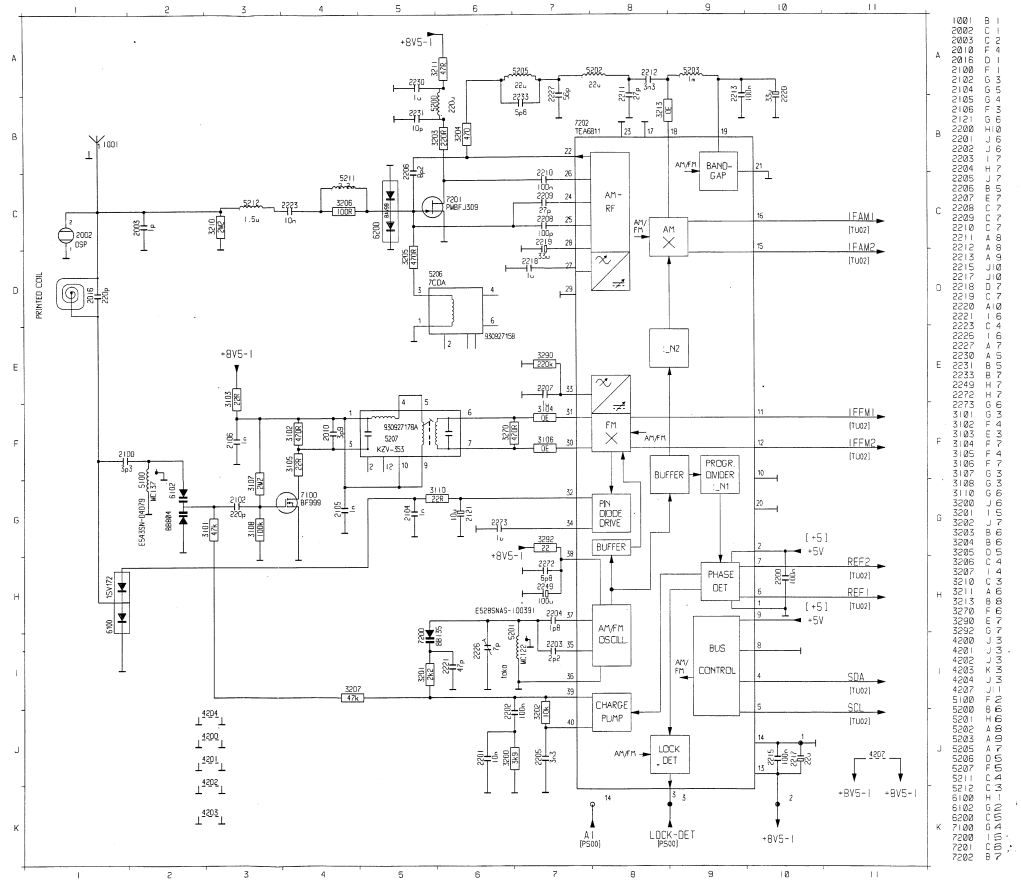


IC 91 Part II

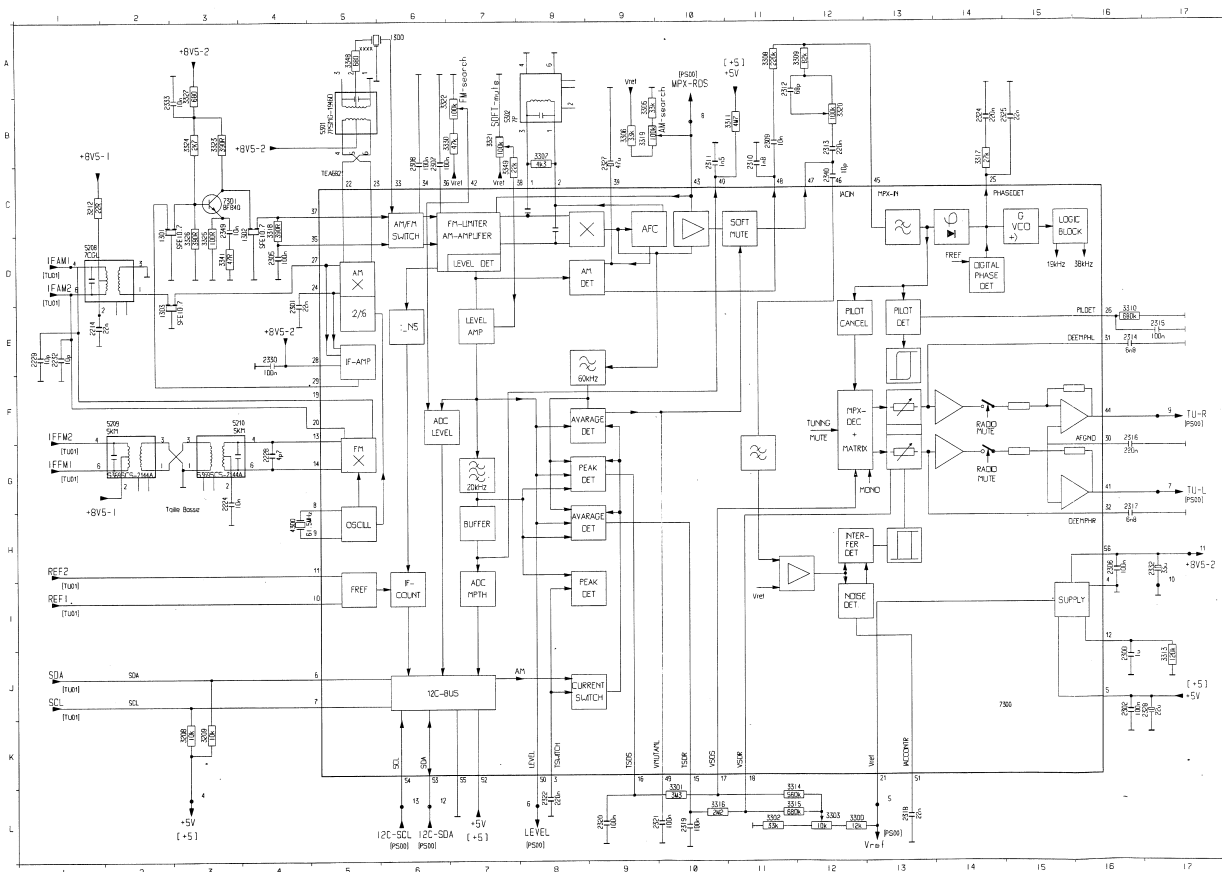

13000	A 6
13001	C 2
13002	C 4
13003	E 2
2014	E 1
2024	G 5
2028	G 4
2029	E 1
2032	J 6
2033	E 4
2034	J 6
2035	D 4
2036	H 6
2037	B 8
2038	B 8
2039	B 1
2040	B 1
2041	B 1
2042	A 1
2043	B 2
2044	E 16
2045	E 17
2046	G 16
2047	H 16
2048	L 13
2049	L 9
2050	L 9
2051	L 9
2052	L 9
2053	L 9
2054	L 9
2055	L 9
2056	L 9
2057	L 9
2058	L 9
2059	L 9
2060	L 9
2061	L 9
2062	L 9
2063	L 9
2064	L 9
2065	L 9
2066	L 9
2067	L 9
2068	L 9
2069	L 9
2070	L 9
2071	L 9
2072	L 9
2073	L 9
2074	L 9
2075	L 9
2076	L 9
2077	L 9
2078	L 9
2079	L 9
2080	L 9
2081	L 9
2082	L 9
2083	L 9
2084	L 9
2085	L 9
2086	L 9
2087	L 9
2088	L 9
2089	L 9
2090	L 9
2091	L 9
2092	L 9
2093	L 9
2094	L 9
2095	L 9
2096	L 9
2097	L 9
2098	L 9
2099	L 9
2100	L 9

Pos.7300 TEA6821	8: 3.9 V (61.5 MHz)	16: 5.4 V / 2.7 V (AM)	24: 2.9 V	32: 2.3 V	40: 1.2 V	48: 4.7 V / 3.2 V (AM)	55: GND
1: 4.0 V / 1.2 V (AM)	9: 3.9 V (61.5 MHz)	17: 3.8 V / 3.5 V (AM)	25: 4.4 V / 3.0 V (AM)	33: 0.8 V / 2.7 V (AM) - 450 KHZ	41: 3.5 V	49: 1...6 V (LEVEL DEP.)	56: 8.4 V
2: 4.0 V / 1.2 V (AM)	10: 4.7 V	18: 3.9 V / 3.4 V (AM)	26: 3.7 V / 0 V (NO STEREO)	34: 1.0 V / 2.7 V (AM)	42: 1.7 V	50: 3...6 V (LEVEL DEP.)	Pos.7301 BF840
3: 5.2 V / 0 V (AM)	11: 4.6 V	19: 8.3 V	27: 2.9 V (10.7 MHz)	35: 2.7 V / 0.8 V (AM)	43: 3.0 V / 2.0 V (AM)	51: 3.7...6 V (LEVEL DEP.) / 0.5 V	B: 0.8 V (10.7 MHz)
4: GND	12: 4.3 V	20: 8.3 V	28: 8.4 V	36: 2.7 V	44: 3.5 V	(AM)	C: 5.8 V (10.7 MHz)
5: 4.9 V	13: 2.3 V	21: 5.0 V	29: 6.1 V (10.7 MHz)	37: 2.7 V / 0.8 V (AM) - 10.7 MHz	45: 2.9 V	52: 4.9 V	E: 0.1 V
6: 4.9 V (SDA)	14: 2.3 V	22: 8.4 V	30: 3.4 V	38: 2.4 V	46: 0 V	53: 4.9 V (SDA)	
7: 4.9 V (SCL)	15: 5.5 V / 2.8 V (AM)	23: 8.4 V	31: 2.3 V	39: 3.2 V / 1.5 V (AM)	47: 3.1 V / 0 V (AM)	54: 4.9 V (SCL)	

LCA / DOLBY

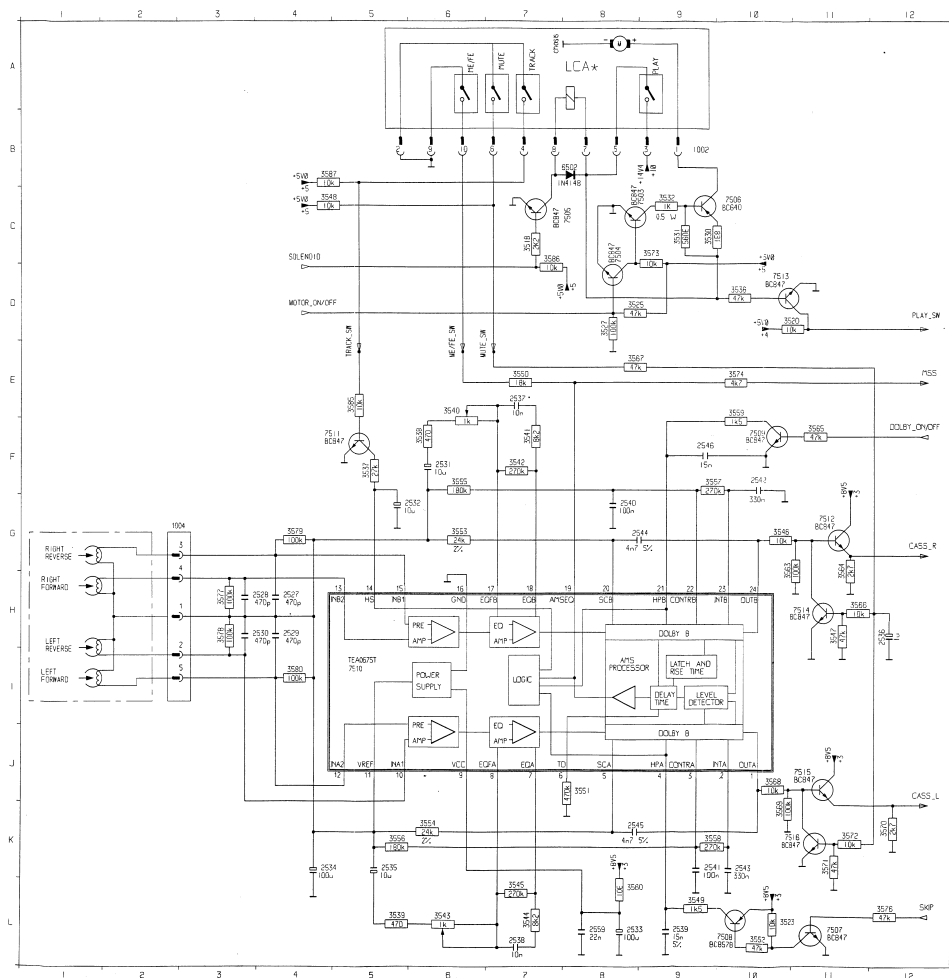

2802	291
2803	292
2827	44
2828	45
2830	46
2831	47
2832	48
2833	49
2834	50
2835	51
2836	52
2837	53
2838	54
2839	55
2840	56
2841	57
2842	58
2843	59
2844	60
2845	61
2846	62
2847	63
2848	64
2849	65
2850	66
2851	67
2852	68
2853	69
2854	70
2855	71
2856	72
2857	73
2858	74
2859	75
2860	76
2861	77
2862	78
2863	79
2864	80
2865	81
2866	82
2867	83
2868	84
2869	85
2870	86
2871	87
2872	88
2873	89
2874	90
2875	91
2876	92
2877	93
2878	94
2879	95
2880	96
2881	97
2882	98
2883	99
2884	100
2885	101
2886	102
2887	103
2888	104
2889	105
2890	106
2891	107
2892	108
2893	109
2894	110
2895	111
2896	112
2897	113
2898	114
2899	115
2900	116
2901	117
2902	118
2903	119
2904	120
2905	121
2906	122
2907	123
2908	124
2909	125
2910	126
2911	127
2912	128
2913	129
2914	130
2915	131
2916	132
2917	133
2918	134
2919	135
2920	136
2921	137
2922	138
2923	139
2924	140
2925	141
2926	142
2927	143
2928	144
2929	145
2930	146
2931	147
2932	148
2933	149
2934	150
2935	151
2936	152
2937	153
2938	154
2939	155
2940	156
2941	157
2942	158
2943	159
2944	160
2945	161
2946	162
2947	163
2948	164
2949	165
2950	166
2951	167
2952	168
2953	169
2954	170
2955	171
2956	172
2957	173
2958	174
2959	175
2960	176
2961	177
2962	178
2963	179
2964	180
2965	181
2966	182
2967	183
2968	184
2969	185
2970	186
2971	187
2972	188
2973	189
2974	190
2975	191
2976	192
2977	193
2978	194
2979	195
2980	196
2981	197
2982	198
2983	199
2984	200
2985	201
2986	202
2987	203
2988	204
2989	205
2990	206
2991	207
2992	208
2993	209
2994	210
2995	211
2996	212
2997	213
2998	214
2999	215
3000	216

Pos.7503 BC847
B: 0 V / 0,7 V (CASS.MODE)
C: 0 V / 14,0 V (CASS.STANDBY)
E: GND

Pos.7504 BC847
B: 0 V / 0,7 V (CASS.MODE)
C: 0 V / 0,8 V (CASS.MODE)
E: GND

Pos.7505 BC847
B: 0 V / 0,7 V (CASS.MODE)
C: 14,0 V / 0,3 V (CASS.MODE)
E: GND

Pos.7506 BC640
B: 14,0 V / 0 V (CASS.EJECT)
C: 0 V / 14,0 V (CASS.MODE)
E: 14,0 V / 0 V (CASS.EJECT)

Pos.7507 BC847
B: 0 V
C: 8,4 V
E: GND

Pos.7508 BC857B
B: 8,4 V
C: 4,0 V
E: 8,4 V

Pos.7509 BC847
B: 0,6 V / 0 V (DOLBY ON)
C: 0 V / 4,0 V (DOLBY ON)
E: GND

Pos.7510 TEA0675TV/1
1: 4,0 V
2: 3,8 V
3: 3,9 V
4: 4,0 V
5: 4,0 V
6: 6,3 V
7: 4,0 V
8: 4,0 V
9: 8,2 V
10: 4,0 V
11: 4,0 V
12: 4,0 V
13: 4,0 V
14: 2,5 V / 6,3 V (CASS.MODE)
15: 4,0 V
16: GND
17: 4,0 V
18: 4,0 V
19: 4,5 V (LOW WHEN MSS PAUSE DET.)
20: 0 V
21: 0,5 V / 4,0 V (DOLBY ON)
22: 4,0 V
23: 3,8 V
24: 4,0 V

Pos.7511 BC847
B: 0,0 V (CASS.NOR) / 0,7 V (CASS.REV)
C: 6,0 V (CASS.NOR) / 0 V (CASS.REV)
E: GND

Pos.7512 BC847
B: 0 V / 3,6 V (CASS.MODE)
C: 8,4 V
E: 0 V / 3,0 V (CASS.MODE)

Pos.7513 BC847
B: 0,7 V / 0 V (CASS.EJECT)
C: 0 V / 5,0 V (CASS.EJECT)
E: GND

Pos.7514 BC847
B: 0,6 V (CASS.MODE)
C: 0 V / 3,6 V (CASS.MODE)
E: GND


Pos.7515 BC847
B: 0 V / 3,6 V (CASS.MODE)
C: 8,4 V
E: 0 V / 3,0 V (CASS.MODE)

Pos.7516 BC847
B: 0,6 V / 0 V (CASS.MODE)
C: 0 V / 3,6 V (CASS.MODE)
E: GND

[illegible]

B: 0 V (HIGH WHEN BEEP)
C: 8,2 V (LOW HEN BEEP)
E: 0 V

uC / RDS / Noise / Multipath

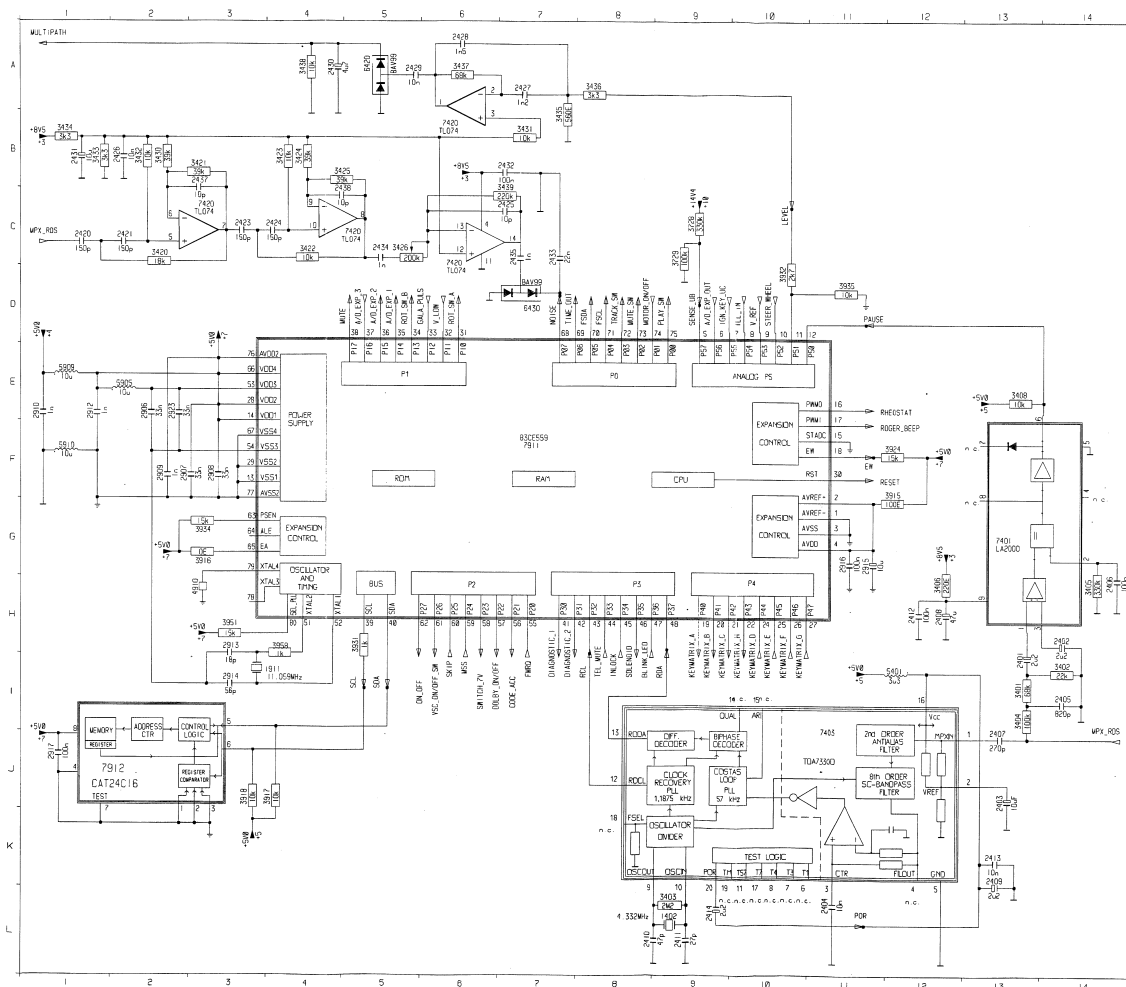

1402 L 9 7912 J 1

1482	L 9	7912	J 1
2481	I 4		
2482	I 4		
2483	J13		
2484	L11		
2485	H14		
2486	H14		
2487	I 3		
2488	H12		
2489	K13		
2490	B 8		
2491	L 9		
2492	H12		
2493	K13		
2494	L 9		
2495	I 1		
2496	C 2		
2497	C 2		
2498	A 4		
2499	L 7		
2500	A 6		
2501	C 2		
2502	A 4		
2503	C 2		
2504	B 7		
2505	C 7		
2506	C 7		
2507	A 5		
2508	A 4		
2509	C 3		
2510	C 3		
2511	C 3		
2512	C 3		
2513	C 3		
2514	C 3		
2515	D11		
2516	I 1		
2517	J 2		
2518	I 3		
2519	I 3		
2520	I 3		
2521	D11		
2522	I 3		
2523	I 3		
2524	I 3		
2525	I 3		
2526	I 3		
2527	I 3		
2528	I 3		
2529	I 3		
2530	I 3		
2531	I 3		
2532	I 3		
2533	I 3		
2534	I 3		
2535	I 3		
2536	I 3		
2537	I 3		
2538	I 3		
2539	I 3		
2540	I 3		
2541	I 3		
2542	I 3		
2543	I 3		
2544	I 3		
2545	I 3		
2546	I 3		
2547	I 3		
2548	I 3		
2549	I 3		
2550	I 3		
2551	I 3		
2552	I 3		
2553	I 3		
2554	I 3		
2555	I 3		
2556	I 3		
2557	I 3		
2558	I 3		
2559	I 3		
2560	I 3		
2561	I 3		
2562	I 3		
2563	I 3		
2564	I 3		
2565	I 3		
2566	I 3		
2567	I 3		
2568	I 3		
2569	I 3		
2570	I 3		
2571	I 3		
2572	I 3		
2573	I 3		
2574	I 3		
2575	I 3		
2576	I 3		
2577	I 3		
2578	I 3		
2579	I 3		
2580	I 3		
2581	I 3		
2582	I 3		
2583	I 3		
2584	I 3		
2585	I 3		
2586	I 3		
2587	I 3		
2588	I 3		
2589	I 3		
2590	I 3		
2591	I 3		
2592	I 3		
2593	I 3		
2594	I 3		
2595	I 3		
2596	I 3		
2597	I 3		
2598	I 3		
2599	I 3		
2600	I 3		

Pos.6420 BAV99
1: 0 V
2: GND
3: 0 V

Pos.6430 BAV99
1: 0 V
2: GND
3: 0 V

Pos.7401 LA2000
1: 2.0 V
2: 7.3 V / 0 V (AM)
3: 2.0 V
4: NC
5: GND
6: 4.9 V
7: 8: NC
9: 7.5 V

Pos.7403 TDA730BD
1: 2.2 V
2: 2.2 V
3: 1.5 V
4: NC
5: GND
6: 8: NC
9: 2.4 V (4.3 MHZ)
10: 2.2 V (4.3 MHZ)
11: NC
12: 2.5 V (RCL)
13: ca.2 V (RDA)
14, 15: NC
16: 4.9 V
17: 19: NC
20: 0 V

Pos.7420 TL074
1: 3: 4.2 V
4: 8.4 V
5: 10: 4.2 V
11: GND
12: 14: 4.2 V

Pos.7911 P83CE559EFB/006
1: GND
2: 4.9 V
3: GND
4: 4.9 V
5: 3.2 V
6: 2.3 V
7: 2.9 V
8: 0 V / 5.0 V (EXTILLON)
9: 3.9 V
10: 4.7 V (WITHOUT STEERING WHEEL CONTROLS) (SEE ALSO STEERING WHEEL INPUT TABLE)
11: 2.5: 5.0 V (LEVEL DEP.)
12: 4.9 V
13: GND
14: 4.9 V
15: GND
16: 0 V / 5.0 V (WITHOUT DETACH UNIT)
17: 0 V / HIGH WHEN BEEP
18: 22: 4.9 V
23: NC
24: 27: 4.9 V
28: 4.9 V

29: GND
30: 0 V
31: 4.9 V / 0.5 V (DEPENDS ON VOL.POTI POSITION)
32: 4.9 V
33: 0 V
34: 4.9 V / 0.5 V (DEPENDS ON VOL.POTI POSITION)
35: 37: DATA LINE - NO VOLTAGE MEASURABLE
38: 0 V
39: 4.9 V (SCL)
40: 4.9 V (SDA)
41: 4.9 V
42: 3.6 V
43: 2.5 V
44: 4.9 V / 0.2 V (PHONE)
45: 4.9 V
46: 0 V / 1.9 V (CASS.MODE)
47: 4.9 V / 0 V (BLINK LED)
48: ca.2 V (RDA)
49, 50: NC
51: 2.5 V (11 MHZ)
52: 2.0 V (11 MHZ)
53: 4.9 V
54: 0 V
55: 4.7 V (DISPLAY MRQ)
56: 4.9 V
57: 4.2 V / 0 V (DOLBY ON)
58: 0 V / 4.3 V (SET OFF)
59: 4.8 V / LOW WHEN MSS PAUSE DETECTION
60: 0 V / HIGH WHEN MSS PAUSE DETECTION
61: 4.9 V / LOW WHEN PUSHING ON/OFF SWITCH
62: 0 V / 4.3 V (SET OFF)
63: 4.9 V
64: NC
65: 4.9 V
66: 4.9 V
67: GND
68: 0 V
69: 4.0 V
70: 4.9 V (DISPLAY SDA)
71: 4.8 V (DISPLAY SCL)
72: 0 V (NOR) / 2.8 (REV)
73: 4.2 V (RADIO) / 0 V (CASS.MODE)
74: 0.6 V (RADIO) / 0 V (CASS.MODE)
75: 0 V / 5.0 V (CASS.EJECT)
76: 4.9 V
77: GND
78: NC
79: GND
80: 4.9 V SENSITIVE MEASURING POINT I

Pos.7912 CAT24C16
1: 4: GND
5: 4.9 V (SDA)
6: 4.9 V (SCL)
7: GND
8: 5.0 V

ALL MEASUREMENTS WITH CODE ACTIVATED

Pos.7760 BC847
B: 0.6 V / 0 V (SET OFF)
C: 0 V / 3.6 V (SET OFF)
E: GND

Pos.7761 BC847
B: 0 V / BLINK LED (SET OFF)
C: 0 V / 3.6 V (SET OFF)
E: GND

Pos.7762 BC847
B: 0 V / BLINK LED (SET OFF)
C: 0 V / BLINK LED (SET OFF)
E: GND

Pos.7763 BC847
B: 0 V / BLINK LED (SET OFF)
C: 0 V / ca.4.8 V (SET OFF)
E: GND

Pos.7764 BC857
B: 5.0 V / 4.3 V (SET OFF)
C: 0 V / 5.0 V (SET OFF)
E: 5.0 V

Pos.7768 BC857
B: 14.0 V / 0 V (SET OFF)
C: 0 V / 0.5 V (SET OFF)
E: 14.0 V / 0.5 V (SET OFF)


Pos.7769 BC847
B: 0 V / 0.6 V (SET OFF)
C: 14.0 V / 0 V (SET OFF)
E: GND

Pos.7770 BC857
B: 14.0 V / 0.5 V (SET OFF)
C: 14.0 V / 0.5 V (SET OFF)
E: 14.0 V / 0.5 V (SET OFF)

Pos.7771 BC847
B: 0 V / 0.6 V (EXTILLON)
C: 14.0 V / 0 V (EXTILLON)
E: GND


Pos.7906 HEF4051BT
1: 0 V - 5 V (DEPENDS ON TREBLE POTI POSITION)
2: 0 V - 5 V (DEPENDS ON BALANCE POTI POSITION)
3: 2.5 V
4: 4.7 V / 0 V (FE-CASS.IN)
5: 0.2 - 4.0 V (DEPENDS ON RESISTORS IN DETACH UNIT)
6 - 8: GND
9 - 11: DATA LINE - NO VOLTAGE MEASURABLE
12: 0 V - 5 V (DEPENDS ON FADER POTI POSITION)
13: 0 V - 1 V (MULTIPATH DEP.)
14: 3.1 V
15: 0 V - 5 V (DEPENDS ON BASS POTI POSITION)
16: 5.0 V

Front ports

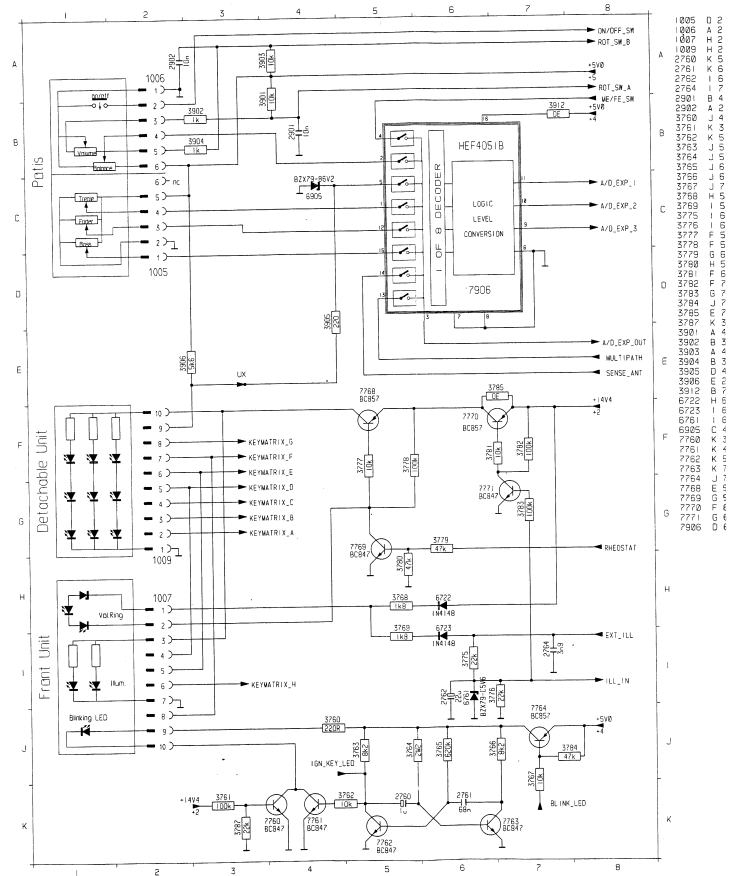

Connectorblock / power supply

10	B 7	2715	H 6	2752	D 6	2924	F 4	3706	F 5	3717	J 6	3732	I 18	3741	I 4	3758	K 16	3759	K 17	3909	G 4	3939	D 11	6784	G 6	6715	F 12	6987	D 8	7714	E 5	7723	J 4
31	C 1	2716	D 6	2753	I 7	3582	C 2	3707	F 5	3719	G 7	3733	H 5	3742	J 7	3751	F 13	3770	D 5	3910	F 4	3939	E 11	6785	D 6	6716	G 11	6988	D 9	7715	G 5	7724	I 9
32	B 3	2718	C 6	2754	I 18	3583	C 2	3708	F 5	3720	G 7	3734	H 5	3743	H 9	3752	D 12	3771	E 5	3913	D 4	3940	E 14	6786	E 5	6717	F 4	6989	D 10	7716	G 9	7755	I 3
21	G 18	2719	C 5	2755	K 8	3584	B 3	3709	F 6	3721	G 8	3735	J 17	3744	J 5	3753	F 11	3772	I 9	3919	C 3	3941	C 11	6788	K 16	6718	H 7	7591	C 1	7717	G 9	7987	D 12
32	F 13	2750	I 5	2756	K 16	3675	C 3	3710	F 6	3724	J 18	3736	D 4	3745	H 9	3754	F 11	3773	I 9	3928	C 9	3943	D 13	6710	I 18	6719	I 16	7701	F 17	7718	J 7	7988	D 12
18	H 15	2751	H 5	2757	K 17	3676	C 3	3713	O 6	3725	K 4	3737	O 4	3746	F 5	3755	F 12	3774	I 8	3929	C 9	3944	D 17	6711	I 4	6720	J 8	7706	I 11	7719	J 18	7989	E 12
37	H 13	2752	I 4	2763	J 4	3781	H 13	3714	H 6	3727	K 3	3739	I 5	3747	I 5	3756	G 12	3786	K 4	3930	C 10	3945	C 5	6712	J 10	6721	J 17	7711	G 12	7720	I 17	7910	E 13
38	H 18	2753	I 8	2768	C 3	3782	H 12	3715	H 6	3728	J 17	3739	K 7	3748	J 16	3757	I 11	3807	C 4	3936	C 8	3946	C 5	6713	J 8	6782	I 5	7712	H 12	7721	K 16	7915	J 8
19	O 18	2751	H 13	2769	O 3	3783	H 18	3716	H 6	3731	H 11	3749	I 11	3749	J 15	3758	K 16	3808	C 4	3937	C 8	3947	C 5	6714	F 13	6984	D 4	7713	J 5	7722	H 4		

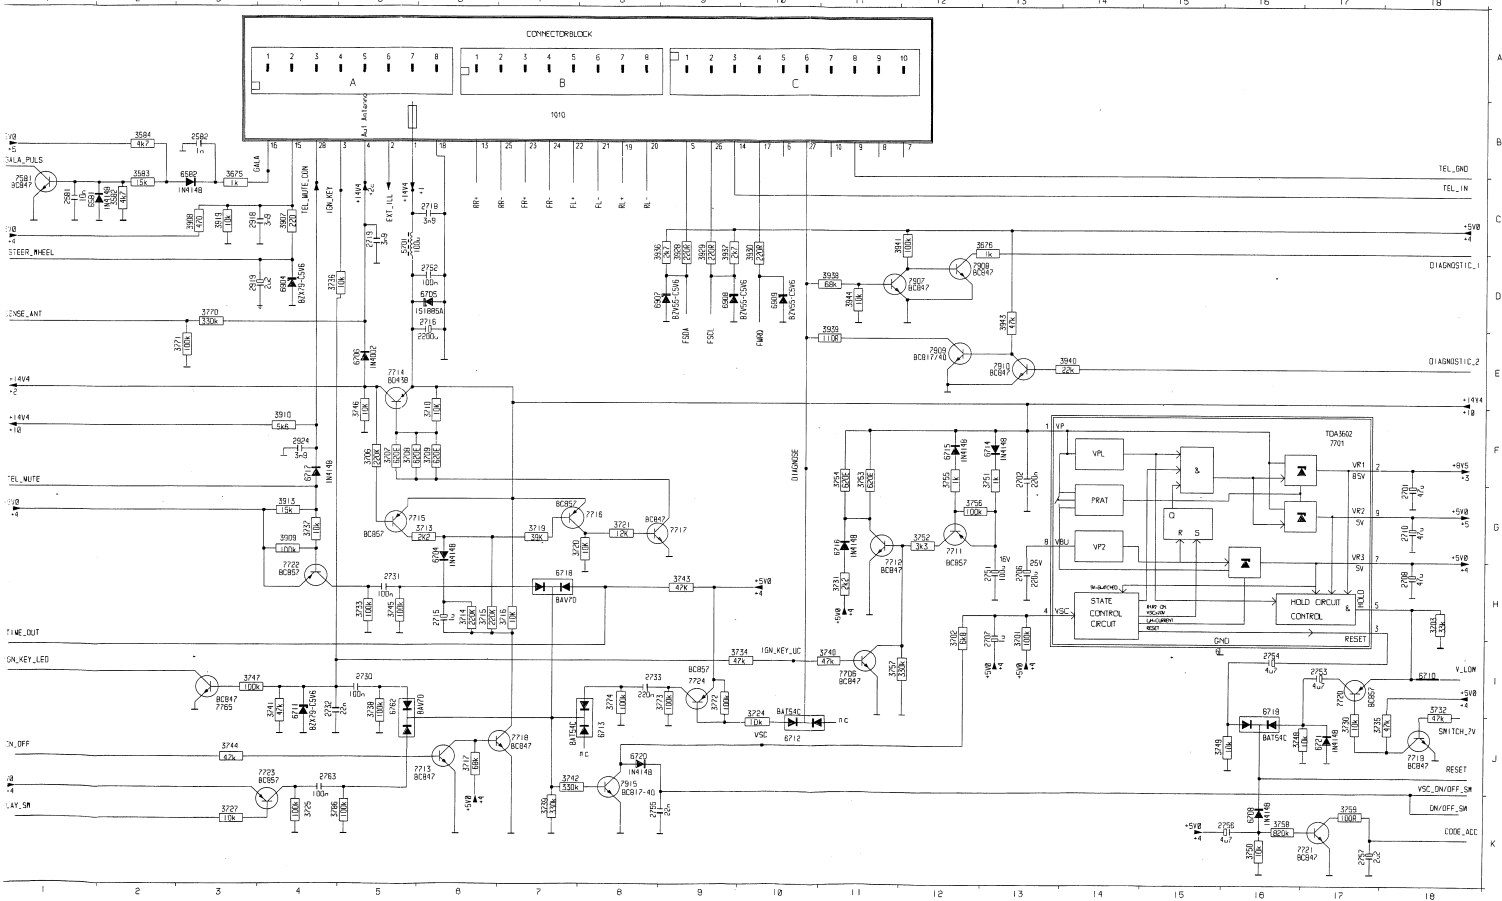

CONNECTIONS

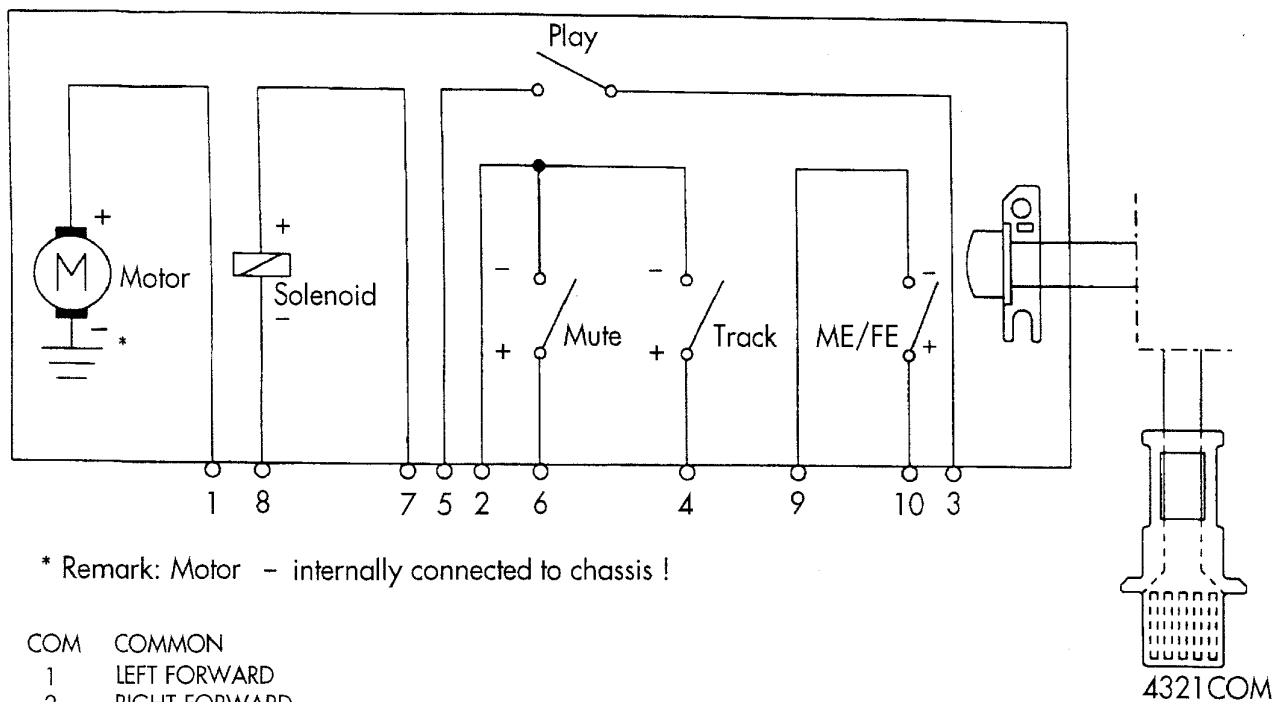


Fig. K

Fig. N

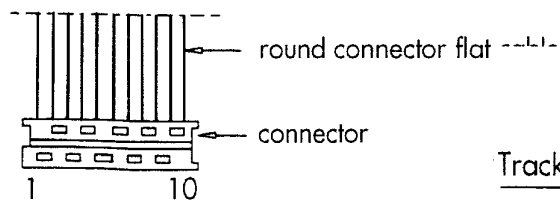


Fig. L

wire	colour	function
1	red	Motor+
2	brown	COMMON
3	orange	+14V
4	yellow	Track SW
5	green	Play SW
6	blue	Mute SW
7	violet	+ Solenoid
8	grey	- Solenoid
9	white	- ME/FE
10	black	+ ME/FE

Fig. O

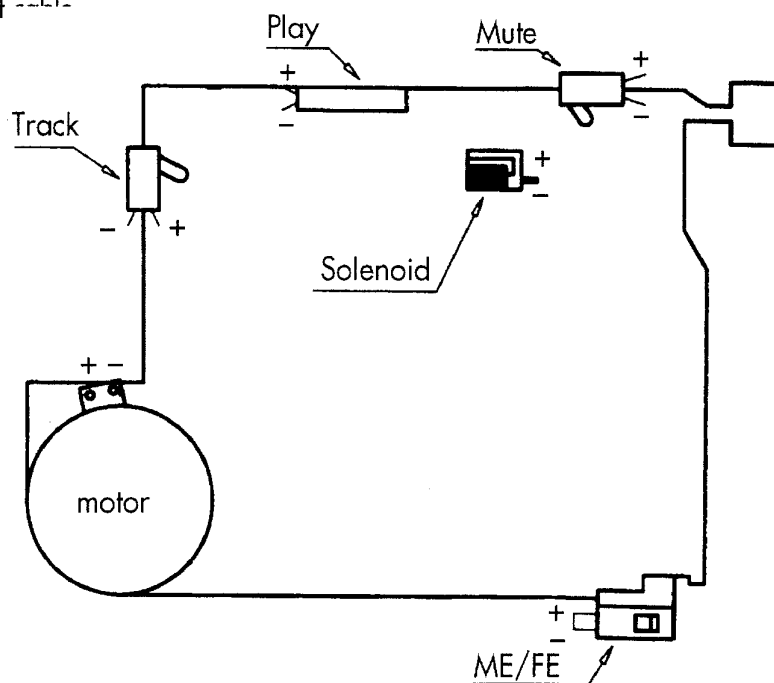


Fig. M