

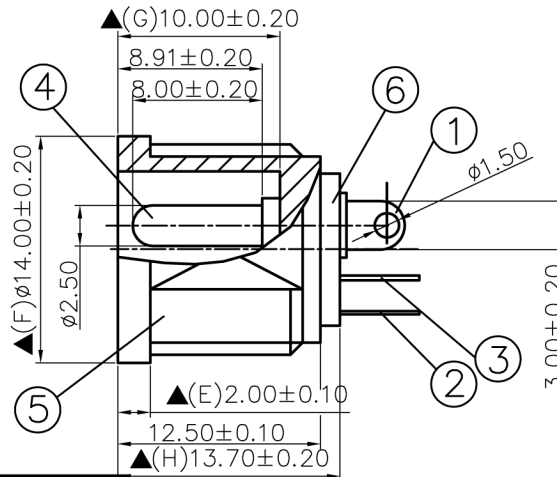
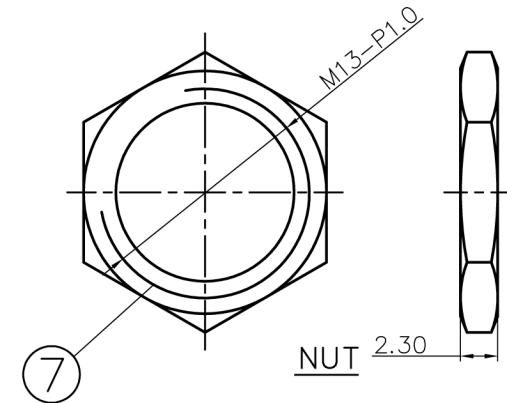
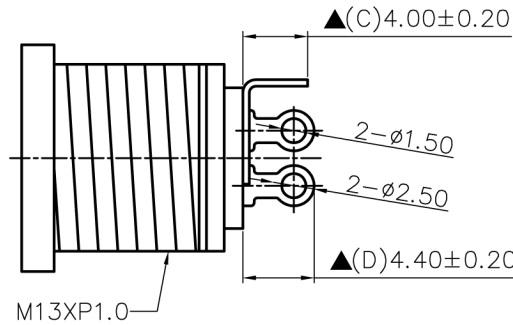


SCHEMATIC	
MODEL NO	C

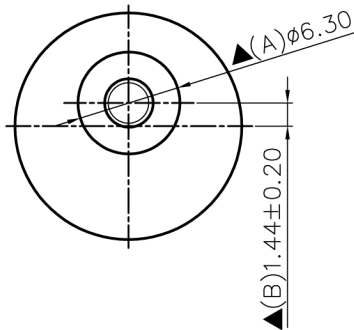

7.	Nut	2.3T Brass	1	Nickel Plated
6.	Insulator	1.2T Bakelite	1	Natural
5.	Housing	PBT	1	Black Color
4.	Pin(2.5φ)	Copper	1	Nickel Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q' TY	Finish

YANG YUN INDUSTRY LTD.

DATE	DWN	CHKD	APVD	MANAGER
11.22.2012				

PART NAME : DC POWER JACK PART NUMBER:SCD523DCS100B00G

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24VDC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考